
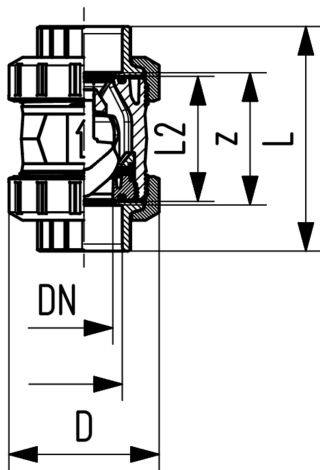




Check valve type 562 PVC-U
With solvent cement sockets Inch ASTM
Inclusive 2 threaded valve ends NPT

Model:

- For horizontal or vertical installation
- Sealing at a minimum water column of 1 m
- Spring loaded, spring made of stainless steel (1.4310)
- Spring available in other materials, see spare parts
- Designed for easy installation and removal
- Vibration free even at high flow velocity
- Flow-optimized return cone, double guided
- Compact installation length, same as ball valve type 546
- Z-length, end connectors and union nuts **not** compatible with type 360
- New DN65-DN100

d	NPT	DN	PN	kv-value	EPDM	SP	Weight	FKM	SP	Weight
(mm)	(inch)	(mm)	(bar)	($\Delta p=1$ bar)	Code		(kg)	Code		(kg)
				(l/min)						
16	3/8	10	16	190	161 562 101	1	0.130	161 562 111	1	0.130
20	1/2	15	16	180	161 562 102	1	0.130	161 562 112	1	0.130
25	3/4	20	16	380	161 562 103	1	0.260	161 562 113	1	0.280
32	1	25	16	460	161 562 104	1	0.300	161 562 114	1	0.300
40	1 1/4	32	16	850	161 562 105	1	0.510	161 562 115	1	0.510
50	1 1/2	40	16	1080	161 562 106	1	0.750	161 562 116	1	0.760
63	2	50	16	1670	161 562 107	1	1.330	161 562 117	1	1.330
75	2 1/2	65	16	2950	161 562 108	1	3.230	161 562 118	1	3.250
90	3	80	16	3600	161 562 109	1	5.080	161 562 119	1	5.100
110	4	100	16	4150	161 562 110	1	8.150	161 562 120	1	8.190

D	L	L2	z
(mm)	(mm)	(mm)	(mm)
50	105	56	67
50	105	56	61
58	121	65	70
68	133	71	76
84	154	85	90
97	164	89	94
124	183	101	107
166	233	136	144
200	254	141	151
238	301	164	174

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail: info.ps@georgfischer.com Internet: <http://www.gfps.com>