

PROGEF Standard
Diaphragm valve type 517
With fixed flanges PP-H JIS


Model:

- Material: PP-H
- Double flow rate compared to predecessor
- One housing nut replaces four screws
- Handwheel with built-in locking mechanism
- Flat sealing faces/serrated
- Connecting dimension: JIS B2238/39 10K

Option:

- Individual configuration of the valve
- Self adjusting multifunctional module with integrated limit switches

* O-Ring material: FKM

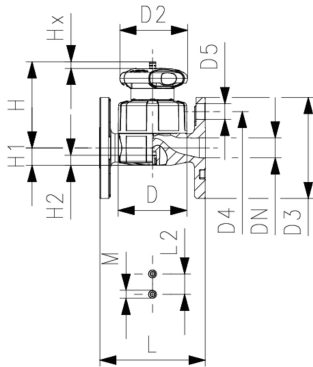

d	DN	Size	PN	kv-value	EPDM	SP	Weight	PTFE/EPDM	SP	Weight
(mm)	(mm)	(inch)	(bar)	($\Delta p=1$ bar)	Code		(kg)	Code		(kg)
				(l/min)						
20	15	½	10	125	167 517 912	1	0.426	167 517 932	1	0.434
25	20	¾	10	271	167 517 913	1	0.504	167 517 933	1	0.514
32	25	1	10	481	167 517 914	1	1.149	167 517 934	1	1.168
40	32	1 ¼	10	759	167 517 915	1	1.443	167 517 935	1	1.462
50	40	1 ½	10	1263	167 517 916	1	2.420	167 517 936	1	2.449
63	50	2	10	1728	167 517 917	1	3.055	167 517 937	1	3.082

D	D2	D3	D4	D5	H	H1	H2	L	L2	M	Lift = Hx
(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)		(mm)
65	65	95	70	15	73	14	12	110	25	M6	7
80	65	100	75	15	81	18	12	120	25	M6	10
88	87	125	90	19	107	22	12	130	25	M6	13
101	87	135	100	19	115	26	15	180	45	M8	15
117	135	140	105	19	148	32	15	180	45	M8	19
144	135	155	120	19	166	39	15	210	45	M8	25

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail: info.ps@georgfischer.com Internet: <http://www.gfps.com>