




Check valve type 561 PVC-U
With solvent cement sockets JIS

Model:

- Sealing at a minimum water column of 2 m
- Designed for easy installation and removal
- Vibration free even at high flow velocity
- Flow-optimized return cone, double guided
- For vertical installation
- Compact installation length, same as ball valve type 546
- Z-length, end connectors and union nuts **not** compatible with type 360
- New DN65-DN100

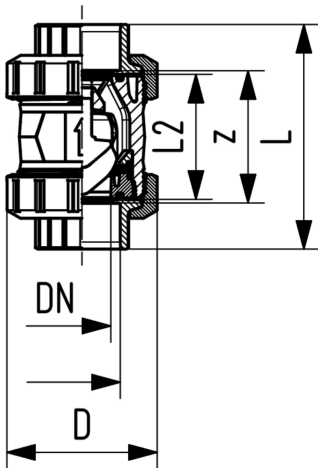

d	DN	Size	PN	kv-value	EPDM	SP	Weight	D	L	L2	z
(mm)	(mm)	(inch)	(bar)	($\Delta p=1$ bar)	Code		(kg)	(mm)	(mm)	(mm)	(mm)
				(l/min)							
20	15	½	16	180	161 561 302	1	0.130	50	95	56	64
25	20	¾	16	380	161 561 303	1	0.250	58	110	65	72
32	25	1	16	460	161 561 304	1	0.290	68	123	71	79
40	32	1 ¼	16	850	161 561 305	1	0.510	84	146	85	94
50	40	1 ½	16	1080	161 561 306	1	0.750	97	157	89	95
63	50	2	16	1670	161 561 307	1	1.330	124	183	101	107
75	65	2 ½	16	2950	161 561 308	1	3.160	166	233	136	144
90	80	3	16	3600	161 561 309	1	5.040	200	254	141	151
110	100	4	16	4150	161 561 310	1	8.130	238	301	164	174

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:
info.ps@georgfischer.com Internet: <http://www.gfps.com>