


ABS Check valve type 562 With solvent cement sockets metric

Model:

- For horizontal or vertical installation
- Sealing at a minimum water column of 1 m
- Spring loaded, spring made of stainless steel (1.4310)
- Spring available in other materials, see spare parts
- Designed for easy installation and removal
- Vibration free even at high flow velocity
- Flow-optimized return cone, double guided
- Compact installation length, same as ball valve type 546
- Z-length, end connectors and union nuts **not** compatible with type 360
- New DN65-DN100

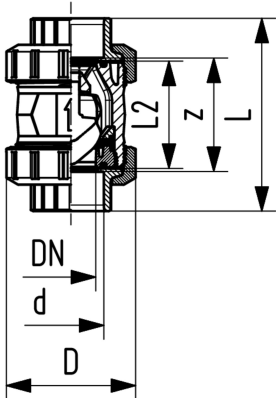

d	DN	PN	kv-value	EPDM	SP	Weight	D	L	L2	z	closest
(mm)	(mm)	(bar)	($\Delta p=1$ bar)	Code		(kg)	(mm)	(mm)	(mm)	(mm)	inch
			(l/min)								(inch)
16	10	10	190	169 562 001	1	0.090	50	92	56	64	$\frac{3}{8}$
20	15	10	180	169 562 002	1	0.090	50	95	56	64	$\frac{1}{2}$
25	20	10	380	169 562 003	1	0.190	58	110	65	72	$\frac{3}{4}$
32	25	10	460	169 562 004	1	0.220	68	123	71	79	1
40	32	10	850	169 562 005	1	0.380	84	146	85	94	1 $\frac{1}{4}$
50	40	10	1080	169 562 006	1	0.560	97	157	89	95	1 $\frac{1}{2}$
63	50	10	1670	169 562 007	1	0.990	124	183	101	107	2
75	65	10	2950	169 562 008	1	2.420	166	233	136	144	2 $\frac{1}{2}$
90	80	10	3600	169 562 009	1	3.870	200	254	141	151	3
110	100	10	4150	169 562 010	1	6.240	238	301	164	174	4

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:
info.ps@georgfischer.com Internet: <http://www.gfps.com>