







PROGEF Standard 3-Way ball valve type 543 Pro
Horizontal/L-port 100-230V
With manual emergency override
With fusion sockets metric
With electric actuator EA15

Model:

- Voltage 100-230V, 50-60Hz
- Factory set control range 90°<
- Basic position A-C opened, activated position B-C opened, see flow scheme
- Other positions possible by adjusting the limit switches
- Heating element, position feedback (Open/Close/ Middle)
- Integrated stainless steel mounting inserts
- Material: PP-H

Option:

- Optional accessories: Fail-safe return unit, Monitoring board, Position controller, Profibus DP board

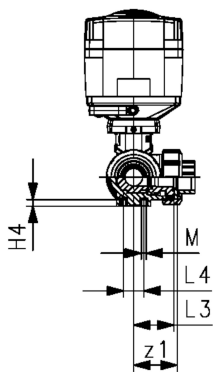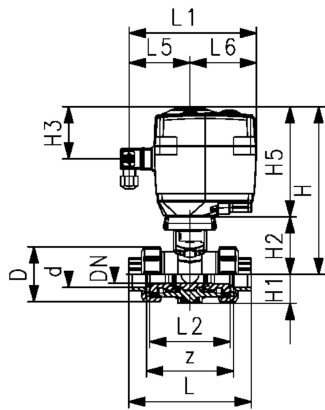

d (mm)	DN (mm)	Size (inch)	PN (bar)	kv-value (Δp=1 bar) (l/min)	EA	EPDM Code	Weight (kg)	FKM Code	Weight (kg)
16	10	3/8	10	50	EA15	199 198 022	2.038	199 198 032	2.038
20	15	1/2	10	75	EA15	199 198 023	2.042	199 198 033	2.042
25	20	3/4	10	150	EA15	199 198 024	2.132	199 198 034	2.132
32	25	1	10	280	EA15	199 198 025	2.257	199 198 035	2.257
40	32	1 1/4	10	480	EA15	199 198 026	2.548	199 198 036	2.548
50	40	1 1/2	10	620	EA15	199 198 027	2.844	199 198 037	2.844
63	50	2	10	1230	EA15	199 198 028	4.205	199 198 038	3.751

d (mm)	D (mm)	H (mm)	H1 (mm)	H2 (mm)	H3 (mm)	H5 (mm)	H6 (mm)	L (mm)	L1 (mm)	L2 (mm)	L3 (mm)	L4 (mm)	L5 (mm)	L6 (mm)	L7 (mm)
16	50	231	28	64	94	167	8	110	180	72	36	25	97	83	122
20	50	231	28	64	94	167	8	112	180	72	36	25	97	83	122
25	58	240	32	73	94	167	8	129	180	85	43	25	97	83	122
32	68	240	36	73	94	167	8	146	180	98	49	25	97	83	122
40	84	251	45	84	94	167	9	170	180	118	59	45	97	83	122
50	97	251	51	84	94	167	9	193	180	135	68	45	97	83	122
63	124	273	65	106	94	167	9	244	180	176	88	45	97	83	122

d (mm)	L8 (mm)	M (mm)	z (mm)	z1 (mm)	closest inch (inch)
16	33	6	82	41	3/8
20	33	6	82	41	1/2
25	33	6	97	49	3/4
32	33	6	110	55	1
40	33	8	132	66	1 1/4
50	33	8	151	76	1 1/2
63	33	8	188	94	2

Data sheet

valid from: 1/23/24



The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail: info.ps@georgfischer.com Internet: <http://www.gfps.com>