


Diastar10 气动隔膜阀 PVC-U
FO (常开)
带PVC-U固定法兰 日标

- 型号:
- 相对于以往产品双倍流速
 - 用一个压紧螺帽代替原先的四个螺栓
 - 气路连接可以旋转90度
 - 平/细齿连接面
 - 连接尺寸: JIS B2238/39 10K

- 选项:
- 可提供其他阀门配置
 - 提供多种附件

* PN: PTFE
工作压力: 单边
* O型圈材质: FKM

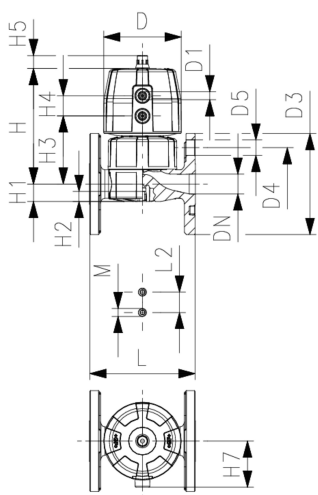

d (mm)	DN (mm)	Inch (inch)	PN (bar)	PN* (bar)	kv-value ($\Delta p=1$ bar) (l/min)	EPDM code	SP	weight (kg)
20	15	1/2	10	10*	125	161 647 912	1	0,672
25	20	3/4	10	10*	271	161 647 913	1	1,046
32	25	1	10	10*	481	161 647 914	1	1,340
40	32	1 1/4	10	10*	759	161 647 915	1	2,174
50	40	1 1/2	10	10*	1263	161 647 916	1	4,012
63	50	2	10	10*	1728	161 647 917	1	4,860

PTFE/ EPDM code	SP	weight (kg)
161 647 932	1	0,682
161 647 933	1	1,057
161 647 934	1	1,360
161 647 935	1	2,194
161 647 936	1	4,042
161 647 937	1	4,888

D	D1_G	D3	D4	D5	H	H1	H2	H3	H4	H5	H7	L	L2	M
(mm)	(inch)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	
68	1/8	95	70	15	101	14	12	60	24	16	43	110	25	M6
96	1/8	100	75	15	132	18	12	73	25	16	57	120	25	M6
96	1/8	125	90	19	143	22	12	84	25	16	57	130	25	M6
120	1/8	135	100	19	173	26	15	99	26	26	69	180	45	M8
150	1/4	140	105	19	214	32	15	119	36	26	88	180	45	M8
150	1/4	155	120	19	226	39	15	132	36	26	88	210	45	M8

Lift = Hx (mm)
7
10
13
15
19
23

Data sheet

valid from: 2023/12/24



The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail: info.ps@georgfischer.com Internet: <http://www.gfps.com>