





PROGEF Standard Ball valve type 546 Pro
With threaded sockets PP-H ASTM NPT Re

Model:

- Material: PP-H
- Lockable lever standard (DN10-DN50)
- For easy installation and removal
- Ball seats PTFE
- Integrated stainless steel mounting inserts
- Z-dimension, valve end and union nut **are compatible** with type 546 (1st Generation)

Option:

- Interface-module with position feedback sensor, incl. LED feedback (DN10-50)
- Manual spring return lever ("Dead man") (DN10-25)
- Pneumatic or electric actuators from GF
- Individual configuration of the valve possible

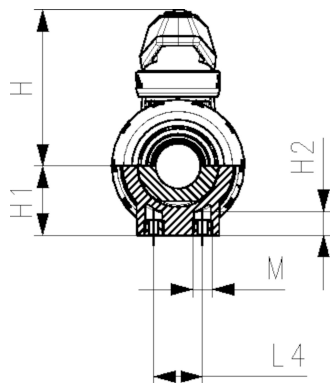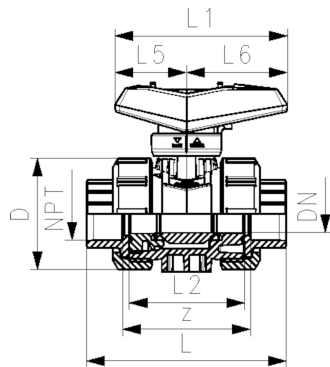

d	DN	PN	Cv-value	EPDM	SP	weight	FKM	SP	weight
(inch)	(mm)	(bar)	(l/min)	Code		(kg)	Code		(kg)
3/8	10	10	71	167 546 321	1	0.120	167 546 331	1	0.120
1/2	15	10	185	167 546 322	1	0.128	167 546 332	1	0.120
3/4	20	10	350	167 546 323	1	0.180	167 546 333	1	0.180
1	25	10	700	167 546 324	1	0.270	167 546 334	1	0.270
1 1/4	32	10	1000	167 546 325	1	0.460	167 546 335	1	0.460
1 1/2	40	10	1600	167 546 326	1	0.635	167 546 336	1	0.635
2	50	10	3100	167 546 327	1	1.204	167 546 337	1	1.190

D	H	H1	H2	L	L1	L2	L4	L5	L6	M	z
(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)		(mm)
50	61	27	12	96	82	56	25	35	47	M6	74
50	61	27	12	99	82	56	25	35	47	M6	70
58	74	30	12	111	106	65	25	44	62	M6	81
68	80	36	12	126	106	71	25	44	62	M6	89
84	95	44	15	146	131	85	45	57	74	M8	106
97	102	51	15	157	131	89	45	57	74	M8	117
124	117	64	15	183	152	101	45	66	86	M8	141

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:
info.ps@georgfischer.com Internet: <http://www.gfps.com>