






PVC-U Ball valve type 127
100-230V
With manual emergency override
With solvent cement sockets PVC-U ASTM

Model:

- Built with electric actuator EA15
- Voltage 100-230V, 50-60Hz
- Factory set control range 90°<
- Heating element, position feedback (Open/Close)
- Integrated stainless steel mounting inserts

Option:

- Other valve and actuator configurations available
- Fail-safe return unit

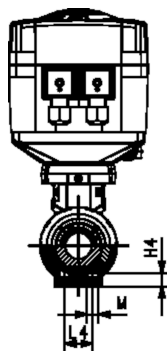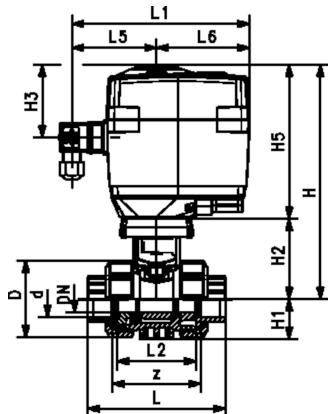

Size (inch)	d (mm)	DN (mm)	PN (bar)	Cv-value (l/min)	EPDM Code	weight (kg)	FKM Code	weight (kg)
3/8	16	10	10	70	199 127 202	2.100	199 127 212	2.100
1/2	20	15	10	185	199 127 203	2.100	199 127 213	2.100
3/4	25	20	10	350	199 127 204	2.200	199 127 214	2.200
1	32	25	10	700	199 127 205	2.300	199 127 215	2.300
1 1/4	40	32	10	1000	199 127 206	2.600	199 127 216	2.600
1 1/2	50	40	10	1600	199 127 207	2.827	199 127 217	3.000
2	63	50	10	3100	199 127 208	3.800	199 127 218	3.800

Size (inch)	D (mm)	H (mm)	H1 (mm)	H2 (mm)	H3 (mm)	H5 (mm)	L (mm)	L1 (mm)	L2 (mm)	L4 (mm)	L5 (mm)	L6 (mm)	L7 (mm)	L8 (mm)	M
3/8	50	197	27	60	64	137	92	161	56	25	77	83	122	33	M6
1/2	50	197	27	60	64	137	95	161	56	25	77	83	122	33	M6
3/4	58	201	30	64	73	137	110	161	65	25	77	83	122	33	M6
1	68	207	36	70	73	137	123	161	71	25	77	83	122	33	M6
1 1/4	84	213	44	76	84	137	146	161	85	45	77	83	122	33	M8
1 1/2	97	219	51	82	84	137	157	161	89	45	77	83	122	33	M8
2	124	234	64	97	106	137	183	161	101	45	77	83	122	33	M8

Size (inch)	z (mm)
3/8	68
1/2	67
3/4	76
1	82
1 1/4	98
1 1/2	99
2	111

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:
 info.ps@georgfischer.com Internet: <http://www.gfps.com>