
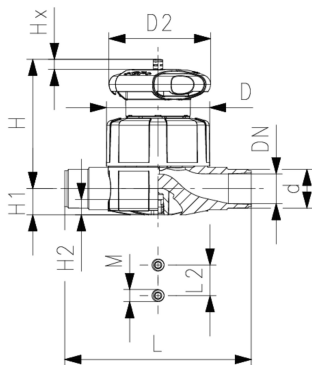




Type 515 Diaphragm Valve PROGEF Standard PP Socket fusion spigot metric

Model:

- Material: PP-H
- Double flow rate compared to predecessor
- One housing nut replaces four screws
- Handwheel with built-in locking mechanism
- Overall length EN 558

Option:

- Individual configuration of the valve
- Self adjusting multifunctional module with integrated limit switches

* O-Ring material: FKM

d (mm)	DN (mm)	Size (inch)	PN (bar)	Cv-value (l/min)	NBR Code	EPDM Code	GP
20	15	½	10	125	167 515 002	167 515 012	
25	20	¾	10	271	167 515 003	167 515 013	
32	25	1	10	481	167 515 004	167 515 014	
40	32	1 ¼	10	759	167 515 005	167 515 015	
50	40	1 ½	10	1263	167 515 006	167 515 016	
63	50	2	10	1728	167 515 007	167 515 017	

d (mm)	PTFE/EPDM Code	FKM Code	SP	weight (kg)
20	167 515 032	167 515 062	1	0.298
25	167 515 033	167 515 063	1	0.293
32	167 515 034	167 515 064	1	0.950
40	167 515 035	167 515 065	1	1.108
50	167 515 036	167 515 066	1	2.057
63	167 515 037	167 515 067	1	2.604

d (mm)	D (mm)	D2 (mm)	H (mm)	H1 (mm)	H2 (mm)	L (mm)	L2 (mm)	M	e (mm)	Lift = Hx (mm)	closest inch (inch)
20	65	65	73	14	12	124	25	M6	1.9	7	½
25	80	65	81	18	12	144	25	M6	2.3	10	¾
32	88	87	107	22	12	154	25	M6	2.9	13	1
40	101	87	115	26	15	174	45	M8	3.7	15	1 ¼
50	117	135	148	32	15	194	45	M8	4.6	19	1 ½
63	144	135	166	39	15	223	45	M8	5.8	25	2

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail: info.ps@georgfischer.com Internet: <http://www.gfps.com>