






**PVC-C Ball valve type 546 Pro with PPA
FC (Fail safe to close)
With solvent cement spigots PVC-C ISO
Without manual override
5.6 bar control pressure**

Model:

- Control pressure supply through integrated NAMUR interface according VDI/VDE 3845
- Full plastic solution (actuator housing made of PP-GF)
- Visual position indicator
- Integrated stainless steel mounting inserts
- z-dimension, valve end and union nut are compatible with type 546 (1st Generation)

Option:

- Position feedback sensor, incl. LED feedback (DN10-50) - PNP, NPN and NAMUR
- Positioner RPC, RPC D, RPC PID
- Individual configuration of valves possible

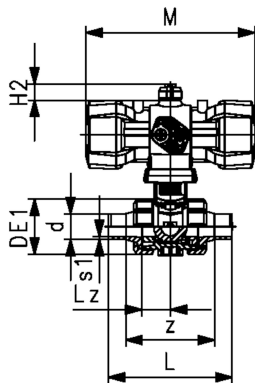

d	DN	Size	PN	kv-value	EPDM	SP	Weight	FKM	SP	Weight
(mm)	(mm)	(inch)	(bar)	($\Delta p=1$ bar)	Code		(kg)	Code		(kg)
				(l/min)						
16	10	3/8	10	70	199 250 542	1	1.159	199 250 552	1	1.159
20	15	1/2	10	185	199 250 543	1	1.159	199 250 553	1	1.159
25	20	3/4	10	350	199 250 544	1	1.276	199 250 554	1	1.276
32	25	1	10	700	199 250 545	1	1.400	199 250 555	1	1.400
40	32	1 1/4	10	1000	199 250 546	1	2.451	199 250 556	1	2.451
50	40	1 1/2	10	1600	199 250 547	1	2.773	199 250 557	1	2.773
63	50	2	10	3100	199 250 548	1	3.314	199 250 558	1	3.631
75	65	2 1/2	10	5000	199 250 549	1	8.300	199 250 559	1	8.300
90	80	3	10	7000	199 250 550	1	11.000	199 250 560	1	11.000
110	100	4	10	11000	199 250 551	1	16.700	199 250 561	1	16.700

d	Actuator	B3	B5	da2	DE1	E	G	G1	H	H2	H4	L	Lz	M	s1
(mm)		(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)
16	PPA08	25	16.2	33	50	74	M6	M5	155	20	12	114	28	159	3.0
20	PPA08	25	16.2	33	50	74	M6	M5	155	20	12	124	28	159	3.0
25	PPA08	25	17.5	33	58	74	M6	M5	159	20	12	144	33	159	3.0
32	PPA15	25	17.5	33	68	94	M8	M5	178	20	12	154	36	211	4.0
40	PPA15	45	23.3	33	84	94	M8	M5	184	20	15	174	43	211	4.5
50	PPA40	45	23.3	33	97	120	M8	M5	213	20	15	194	45	246	5.5
63	PPA40	45	24.3	33	124	120	M8	M5	228	20	15	224	51	246	7.0
75	PPA80	70	28.5	33	166	142	M8	M5	277	20	15	284	68	343	8.5
90	PPA80	70	28.5	33	200	142	M8	M5	289	20	15	300	71	343	10.0
110	PPA80	120	28.5	33	238	142	M12	M5	324	20	22	340	82	343	12.0

d	V1	X5	X6	X7	X10	z
(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)
16	27	80	30	43	38.0	88
20	27	80	30	43	38.0	96
25	30	80	30	43	41.9	112
32	36	80	30	51	47.0	118
40	44	80	30	51	53.5	134
50	51	80	30	62	62.8	148
63	64	80	30	62	77.0	170
75	85	80	30	74	119.0	194
90	105	80	30	74	131.0	196
110	123	80	30	74	145.0	212

Data sheet

valid from: 2/8/25



The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:
info.ps@georgfischer.com Internet: <http://www.gfps.com>