


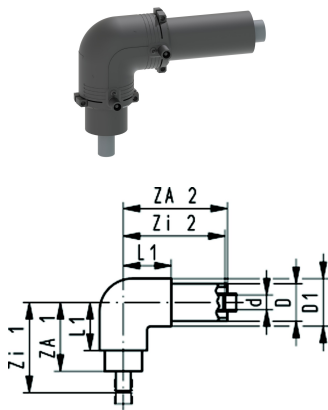

## CONTAIN-IT Plus Elbow 90° PVC-U/PE100 Connections for cementing

| d<br>(mm) | D<br>(mm) | PN<br>(bar) | PN<br>(Outer<br>Pipe)<br>(bar) | SDR  | Tangit<br>Code     | Weight<br>(kg) | DTX<br>Code        | Weight<br>(kg) |
|-----------|-----------|-------------|--------------------------------|------|--------------------|----------------|--------------------|----------------|
| 20        | 50        | 16          | 16                             | 13.6 | <b>721 104 106</b> | 0.453          | <b>721 104 256</b> | 0.455          |
| 25        | 50        | 16          | 16                             | 13.6 | <b>721 104 107</b> | 0.498          | <b>721 104 257</b> | 0.499          |
| 32        | 63        | 16          | 16                             | 13.6 | <b>721 104 108</b> | 0.801          | <b>721 104 258</b> | 0.805          |
| 40        | 75        | 16          | 16                             | 13.6 | <b>721 104 109</b> | 1.262          | <b>721 104 259</b> | 1.403          |
| 50        | 90        | 16          | 10                             | 13.6 | <b>721 104 110</b> | 1.928          | <b>721 104 260</b> | 1.924          |
| 63        | 110       | 16          | 10                             | 13.6 | <b>721 104 111</b> | 3.176          | <b>721 104 261</b> | 3.210          |
| 75        | 125       | 16          | 10                             | 13.6 | <b>721 104 112</b> | 4.450          | <b>721 104 262</b> | 4.718          |
| 90        | 140       | 16          | 10                             | 13.6 | <b>721 104 113</b> | 8.234          | <b>721 104 263</b> | 8.358          |
| 110       | 160       | 16          | 10                             | 13.6 | <b>721 104 114</b> | 9.251          | <b>721 104 264</b> | 9.204          |
| 125       | 180       | 16          | 10                             | 13.6 | <b>721 104 115</b> | 9.800          |                    |                |
| 140       | 200       | 16          | 10                             | 13.6 | <b>721 104 116</b> | 15.600         |                    |                |
| 160       | 225       | 16          | 10                             | 13.6 | <b>721 104 117</b> | 19.700         |                    |                |
| 200       | 280       | 10          | 10                             | 21   | <b>721 104 119</b> | 24.200         |                    |                |
| 225       | 315       | 10          | 10                             | 21   | <b>721 104 120</b> | 30.600         |                    |                |

| d<br>(mm) | D1<br>(mm) | ZA 1<br>(mm) | ZA 2<br>(mm) | L1<br>(mm) | Zi 1<br>(mm) | Zi 2<br>(mm) |
|-----------|------------|--------------|--------------|------------|--------------|--------------|
| 20        | 66         | 105          | 175          | 35         | 139          | 174.0        |
| 25        | 66         | 105          | 175          | 41         | 142          | 171.0        |
| 32        | 81         | 120          | 190          | 47         | 160          | 183.0        |
| 40        | 97         | 145          | 225          | 55         | 189          | 214.0        |
| 50        | 118        | 170          | 260          | 65         | 219          | 244.0        |
| 63        | 139        | 210          | 310          | 79         | 266          | 287.0        |
| 75        | 161        | 225          | 330          | 92         | 288          | 301.0        |
| 90        | 196        | 265          | 375          | 107        | 336          | 339.0        |
| 110       | 196        | 275          | 390          | 128        | 357          | 344.0        |
| 125       | 234        | 295          | 415          | 145        | 386          | 361.0        |
| 140       | 251        | 300          | 420          | 159        | 398          | 359.0        |
| 160       | 281        | 350          | 475          | 180        | 459          | 404.0        |
| 200       | 316        | 410          | 550          | 221        | 540          | 459.0        |
| 225       | 316        | 400          | 550          | 248        | 545          | 446.5        |

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:  
info.ps@georgfischer.com Internet: <http://www.gfps.com>