




**ELGEF Plus Pressure tapping valve PE100**  
**d63-250mm / SDR11 / With 360° rotatable outlet**

- 10 bar Gas / 16 bar Water
- With integrated drill bit to tap live mains under pressure
- Complete with lower part and premounted PE100 coated valve piece
- The valve is closed clockwise
- Number of turns to fully open or close valve is 13 for outlet d32
- Number of turns to fully open or close valve is 28 for outlet d63
- Spindle size (SLW) 14
- 4 mm pin connectors
- Limited path fusion indicators
- Long fusion outlet

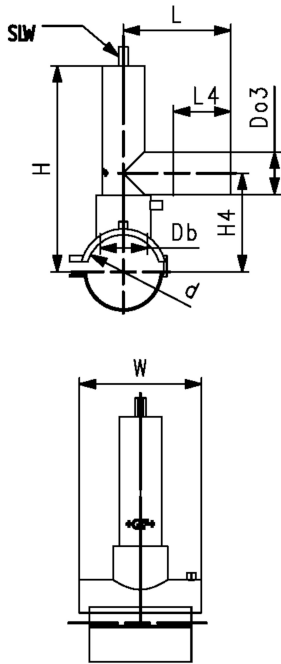

| d    | Do3  | DN   | PN    | Code               | Weight | L    | L4   | Db   | W    | H    | H4   | SDR pipe |
|------|------|------|-------|--------------------|--------|------|------|------|------|------|------|----------|
| (mm) | (mm) | (mm) | (bar) |                    | (kg)   | (mm) | (mm) | (mm) | (mm) | (mm) | (mm) |          |
| 63   | 32   | 50   | 16    | <b>193 155 234</b> | 1.811  | 127  | 70   | 21   | 164  | 202  | 97   | 9 - 11   |
| 63   | 63   | 50   | 16    | <b>193 155 237</b> | 2.680  | 160  | 100  | 31   | 164  | 272  | 112  | 9 - 11   |
| 75   | 32   | 65   | 16    | <b>193 155 244</b> | 1.943  | 127  | 70   | 21   | 164  | 208  | 103  | 9 - 11   |
| 75   | 63   | 65   | 16    | <b>193 155 247</b> | 2.749  | 160  | 100  | 31   | 164  | 278  | 118  | 9 - 11   |
| 90   | 32   | 80   | 16    | <b>193 155 254</b> | 1.894  | 127  | 70   | 21   | 164  | 216  | 111  | 9 - 11   |
| 90   | 63   | 80   | 16    | <b>193 155 257</b> | 2.781  | 160  | 100  | 31   | 164  | 286  | 126  | 9 - 11   |
| 110  | 32   | 100  | 16    | <b>193 155 264</b> | 1.896  | 127  | 70   | 21   | 164  | 226  | 121  | 9 - 17.6 |
| 110  | 63   | 100  | 16    | <b>193 155 267</b> | 2.739  | 160  | 100  | 31   | 164  | 296  | 136  | 9 - 17.6 |
| 125  | 32   | 100  | 16    | <b>193 155 274</b> | 1.986  | 127  | 70   | 21   | 164  | 233  | 128  | 9 - 17.6 |
| 125  | 63   | 100  | 16    | <b>193 155 277</b> | 2.867  | 160  | 100  | 31   | 164  | 303  | 143  | 9 - 17.6 |
| 140  | 32   | 125  | 16    | <b>193 155 284</b> | 2.009  | 127  | 70   | 21   | 164  | 241  | 136  | 9 - 17.6 |
| 140  | 63   | 125  | 16    | <b>193 155 287</b> | 2.908  | 160  | 100  | 31   | 164  | 311  | 151  | 9 - 17.6 |
| 160  | 32   | 150  | 16    | <b>193 155 294</b> | 2.029  | 127  | 70   | 21   | 164  | 251  | 146  | 9 - 17.6 |
| 160  | 63   | 150  | 16    | <b>193 155 297</b> | 2.913  | 160  | 100  | 31   | 164  | 321  | 161  | 9 - 17.6 |
| 180  | 32   | 150  | 16    | <b>193 155 304</b> | 2.111  | 127  | 70   | 21   | 164  | 261  | 156  | 9 - 26   |
| 180  | 63   | 150  | 16    | <b>193 155 307</b> | 2.923  | 160  | 100  | 31   | 164  | 331  | 171  | 9 - 26   |
| 200  | 32   | 200  | 16    | <b>193 155 314</b> | 2.127  | 127  | 70   | 21   | 164  | 271  | 166  | 9 - 26   |
| 200  | 63   | 200  | 16    | <b>193 155 317</b> | 2.980  | 160  | 100  | 31   | 164  | 341  | 181  | 9 - 26   |
| 225  | 32   | 200  | 16    | <b>193 155 324</b> | 2.091  | 127  | 70   | 21   | 164  | 281  | 178  | 11 - 26  |
| 225  | 63   | 200  | 16    | <b>193 155 327</b> | 2.932  | 160  | 100  | 31   | 164  | 353  | 193  | 11 - 26  |
| 250  | 63   | 250  | 16    | <b>193 155 337</b> | 2.978  | 160  | 100  | 31   | 165  | 366  | 206  | 11 - 26  |

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:  
 info.ps@georgfischer.com Internet: <http://www.gfps.com>