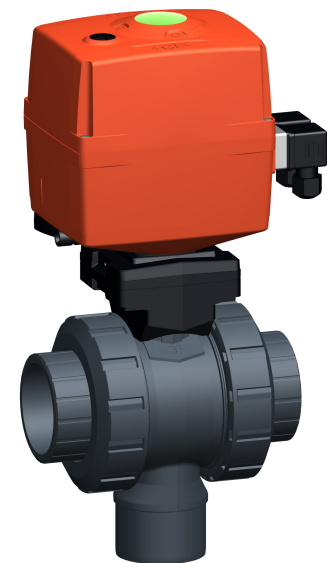


3-Way ball valve type 543 PRO PVC-U
Vertical/L-port 24V
With manual emergency override
With solvent cement sockets metric

Model:



- Voltage 24V AC/DC
- Factory set control range 90°<
- Basic position B-C opened, activated position A-C opened, see flow scheme
- Other positions possible by adjusting the limit switches
- Heating element, position feedback (Open/Close/ Middle)
- Integrated stainless steel mounting inserts

Option:

- Optional accessories: Fail-safe return unit, Monitoring board, Position controller, Profibus DP board

d	DN	Size	PN	kv-value	EA	EPDM	Weight	FKM	Weight
(mm)	(mm)	(inch)	(bar)	($\Delta p=1$ bar)		Code	(kg)	Code	(kg)
16	10	3/8	10	49	EA25	199 170 262	2.039	199 170 272	2.039
20	15	1/2	10	77	EA25	199 170 263	2.043	199 170 273	2.043
25	20	3/4	10	146	EA25	199 170 264	2.546	199 170 274	2.150
32	25	1	10	260	EA25	199 170 265	2.267	199 170 275	2.267
40	32	1 1/4	10	437	EA25	199 170 266	2.922	199 170 276	2.554
50	40	1 1/2	10	667	EA25	199 170 267	2.818	199 170 277	2.818
63	50	2	10	1293	EA25	199 170 268	3.595	199 170 278	3.595

d	D	H	H1	H2	H3	H5	L	L1	L2	L5	L6	L7	L8	z	closest inch
(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(inch)
16	50	231	62	64	94	167	92	180	56	97	83	122	33	64	3/8
20	50	231	62	64	94	167	95	180	56	97	83	122	33	64	1/2
25	58	240	72	73	94	167	111	180	66	97	83	122	33	74	3/4
32	68	240	77	73	94	167	123	180	71	97	83	122	33	79	1
40	84	251	87	84	94	167	146	180	85	97	83	122	33	95	1 1/4
50	97	251	97	84	94	167	157	180	89	97	83	122	33	95	1 1/2
63	124	273	112	106	94	167	183	180	101	97	83	122	33	107	2

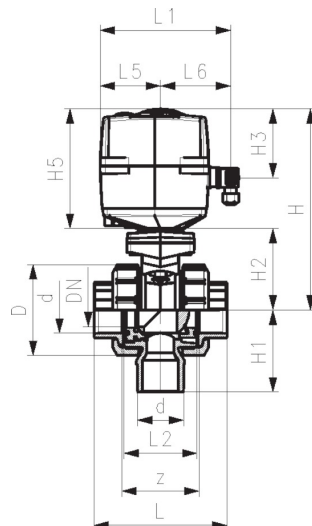

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Data sheet

valid from: 8/9/24



Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:
info.ps@georgfischer.com Internet: <http://www.gfps.com>