




**SYGEF Standard Check valve type 561**  
**Without spring**  
**With butt fusion spigots IR-Plus metric**

**Model:**

- Material: PVDF
- Sealing at a minimum water column of 2 m
- Designed for easy installation and removal
- Vibration free even at high flow velocity
- Flow-optimized return cone, double guided
- For vertical installation
- Compact installation length, same as ball valve type 546
- Z-length, end connectors and union nuts **not** compatible with type 360

Note: CK-54 is defined in both the high purity and low purity specs. GF is not a vendor for low purity CK-54.

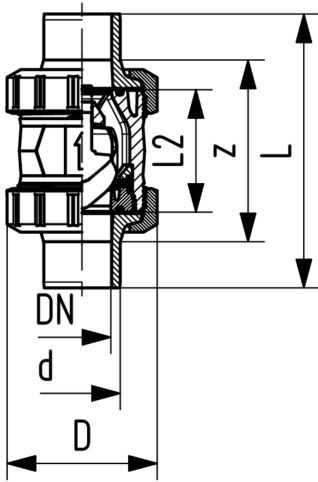

<b>d</b> (mm)	<b>FKM</b> <b>Code</b>
20	<b>175 561 092</b>
25	<b>175 561 093</b>
32	<b>175 561 094</b>
40	<b>175 561 095</b>
50	<b>175 561 096</b>
63	<b>175 561 097</b>
75	<b>175 561 098</b>
90	<b>175 561 099</b>
110	<b>175 561 100</b>

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:  
info.ps@georgfischer.com Internet: <http://www.gfps.com>