




Check valve type 561 PVC-U silicone free
Without spring
With solvent cement spigots metric

Model:

- Sealing at a minimum water column of 2 m
- Silicone free/paint-compatible
- Designed for easy installation and removal
- Vibration free even at high flow velocity
- Flow-optimized return cone, double guided
- For vertical installation
- Compact installation length, same as ball valve type 546
- Z-length, end connectors and union nuts **not** compatible with type 360
- New DN65-DN100

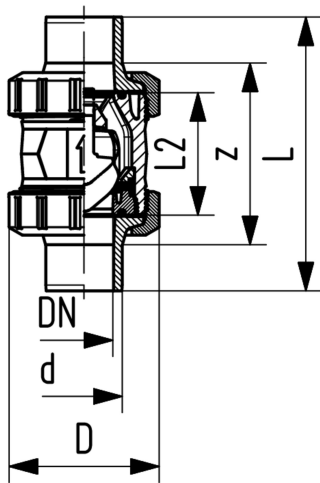

d (mm)	DN (mm)	PN (bar)	kv-value ($\Delta p=1$ bar) (l/min)	EPDM Code	SP	Weight (kg)	FKM Code	SP	Weight (kg)
16	10	16	190	161 561 221	1	0.130	161 561 231	1	0.130
20	15	16	180	161 561 222	1	0.130	161 561 232	1	0.130
25	20	16	380	161 561 223	1	0.260	161 561 233	1	0.280
32	25	16	460	161 561 224	1	0.300	161 561 234	1	0.310
40	32	16	850	161 561 225	1	0.520	161 561 235	1	0.520
50	40	16	1080	161 561 226	1	0.790	161 561 236	1	0.790
63	50	16	1670	161 561 227	1	1.410	161 561 237	1	1.420
75	65	16	2950	161 561 228	1	3.310	161 561 238	1	3.320
90	80	16	3600	161 561 229	1	5.220	161 561 239	1	5.250
110	100	16	4150	161 561 230	1	8.350	161 561 240	1	8.390

d (mm)	D (mm)	L (mm)	L2 (mm)	closest inch (inch)
16	50	114	56	$\frac{3}{8}$
20	50	124	56	$\frac{1}{2}$
25	58	144	65	$\frac{3}{4}$
32	68	154	71	1
40	84	174	85	1 $\frac{1}{4}$
50	97	194	89	1 $\frac{1}{2}$
63	124	224	101	2
75	166	284	136	2 $\frac{1}{2}$
90	200	300	141	3
110	238	340	164	4

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:
 info.ps@georgfischer.com Internet: <http://www.gfps.com>