




Ventilating valve type 595 ABS With solvent cement sockets metric

Model:

- With protection cap up to DN50 made of PP-GF, DN65-100 made of POM
- Spring HALAR coated
- Spring available in other materials, see spare parts
- Designed for easy installation and removal
- Compact installation length

d (mm)	DN (mm)	PN (bar)	EPDM Code	D (mm)	L (mm)	t (mm)	closest inch (inch)
16	10	10	169 595 001	50	126	14	3/8
20	15	10	169 595 002	50	127	16	1/2
25	20	10	169 595 003	58	142	18	3/4
32	25	10	169 595 004	68	155	22	1
40	32	10	169 595 005	84	177	26	1 1/4
50	40	10	169 595 006	97	195	31	1 1/2
63	50	10	169 595 007	124	227	38	2
75	65	10	169 595 008	166	256	45	2 1/2
90	80	10	169 595 009	200	275	52	3
110	100	10	169 595 010	238	318	64	4

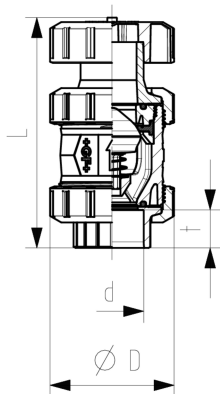

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail: info.ps@georgfischer.com Internet: <http://www.gfps.com>