




ELGEF Plus Tapping saddle (kit) PE100
d63-315mm / SDR11 / With 360° rotatable outlet


- With integrated cutter to tap live mains under pressure
- Complete with lower part
- Limited path fusion indicators
- Long spigot outlet
- EPDM O-ring-sealed screw cap

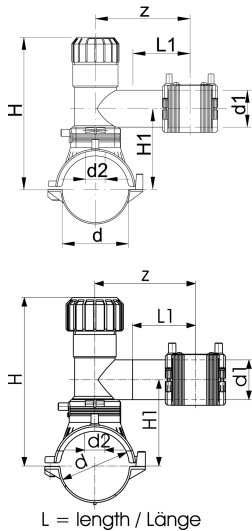

d	d1	Code	SP	weight
(mm)	(mm)			(kg)
63	20	193 132 402	1	0.754
63	25	193 132 403	1	0.761
63	32	193 132 404	1	0.773
63	40	193 132 405	1	0.798
63	50	193 132 436	1	1.619
63	63	193 132 437	1	1.623
75	20	193 132 442	1	0.879
75	25	193 132 443	1	0.900
75	32	193 132 444	1	0.917
75	40	193 132 445	1	0.958
75	50	193 132 446	1	1.748
75	63	193 132 447	1	1.753
90	20	193 132 452	1	0.856
90	25	193 132 453	1	0.858
90	32	193 132 454	1	0.857
90	40	193 132 455	1	0.780
90	50	193 132 456	1	1.711
90	63	193 132 457	1	1.707
110	20	193 132 462	1	0.907
110	25	193 132 463	1	0.905
110	32	193 132 464	1	0.875
110	40	193 132 465	1	0.961
110	50	193 132 466	1	1.133
110	63	193 132 467	1	1.330
125	20	193 132 472	1	0.938
125	25	193 132 473	1	0.943
125	32	193 132 474	1	0.955
125	40	193 132 475	1	0.964
125	50	193 132 476	1	1.374
125	63	193 132 477	1	1.161
140	20	193 132 482	1	0.941
140	25	193 132 483	1	0.944
140	32	193 132 484	1	0.972
140	40	193 132 485	1	1.020
140	50	193 132 486	1	1.835
140	63	193 132 487	1	1.833
160	20	193 132 492	1	0.910
160	25	193 132 493	1	0.933
160	32	193 132 494	1	0.954
160	40	193 132 495	1	0.965
160	50	193 132 496	1	1.375
160	63	193 132 497	1	1.378
180	20	193 132 502	1	1.020
180	25	193 132 503	1	1.057
180	32	193 132 504	1	1.045
180	40	193 132 505	1	1.122
180	50	193 132 506	1	1.938
180	63	193 132 507	1	1.918
200	20	193 132 512	1	1.065
200	25	193 132 513	1	1.065
200	32	193 132 514	1	1.095

Data sheet

valid from: 1/24/25


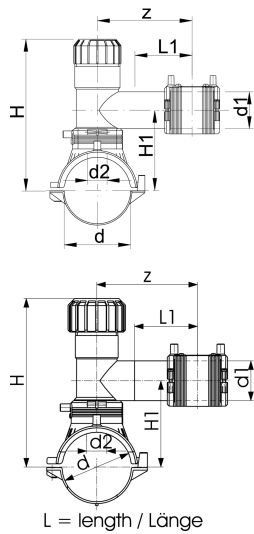


	d (mm)	d1 (mm)	Code	SP	weight (kg)
	200	40	193 132 515	1	1.131
	200	50	193 132 516	1	1.957
	200	63	193 132 517	1	1.900
	225	20	193 132 522	1	1.460
	225	25	193 132 523	1	0.991
	225	32	193 132 524	1	1.095
	225	40	193 132 525	1	1.134
	225	50	193 132 526	1	1.921
	225	63	193 132 527	1	1.951
	250	20	193 132 532	1	1.079
	250	25	193 132 533	1	1.095
	250	32	193 132 534	1	1.092
	250	40	193 132 535	1	1.113
	250	50	193 132 536	1	1.971
	250	63	193 132 537	1	1.923
*	280	32	193 132 544	1	1.455
*	280	40	193 132 545	1	1.500
*	280	50	193 132 546	1	1.500
*	280	63	193 132 547	1	1.510
*	315 - 355	32	193 132 554	1	1.648
*	315 - 355	40	193 132 555	1	1.015
*	315 - 355	50	193 132 556	1	1.440
*	315 - 355	63	193 132 557	1	1.602

d (mm)	d1 (mm)	d2 (mm)	H (mm)	H1 (mm)	L (mm)	L1 (mm)	z (mm)	SDR pipe	TopLoad
63	20	32	186	108	165	76	130	9 - 11	
63	25	32	186	108	165	76	130	9 - 11	
63	32	32	186	108	165	76	130	9 - 11	
63	40	32	186	108	165	76	130	9 - 11	
63	50	32	234	112	165	100	160	9 - 11	
63	63	32	234	112	165	100	160	9 - 11	
75	20	32	191	113	165	76	130	9 - 11	
75	25	32	191	113	165	76	130	9 - 11	
75	32	32	191	113	165	76	130	9 - 11	
75	40	32	240	118	165	76	160	9 - 11	
75	50	32	240	118	165	100	160	9 - 11	
75	63	32	240	118	165	100	160	9 - 11	
90	20	32	199	121	165	76	130	9 - 17.6	
90	25	32	199	121	165	76	130	9 - 17.6	
90	32	32	199	121	165	76	130	9 - 17.6	
90	40	32	199	126	165	76	130	9 - 17.6	
90	50	32	248	126	165	100	160	9 - 17.6	
90	63	32	248	126	165	100	160	9 - 17.6	
110	20	32	209	131	165	76	130	9 - 17.6	
110	25	32	209	131	165	76	130	9 - 17.6	
110	32	32	209	131	165	76	130	9 - 17.6	
110	40	32	209	136	165	76	130	9 - 17.6	
110	50	35	258	136	165	100	160	9 - 17.6	
110	63	35	258	136	165	100	160	9 - 17.6	
125	20	32	216	138	165	76	130	9 - 17.6	
125	25	32	216	138	165	76	130	9 - 17.6	
125	32	32	216	138	165	76	130	9 - 17.6	
125	40	32	216	143	165	76	130	9 - 17.6	
125	50	35	256	143	165	100	160	9 - 17.6	
125	63	35	256	143	165	100	160	9 - 17.6	
140	20	32	234	146	165	76	130	9 - 17.6	
140	25	32	234	146	165	76	130	9 - 17.6	
140	32	32	234	146	165	76	130	9 - 17.6	

Data sheet

valid from: 1/24/25



L = length / Länge

	d	d1	d2	H	H1	L	L1	z	SDR pipe	TopLoad
	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)		
	140	40	32	234	146	165	76	130	9 - 17.6	
	140	50	35	283	151	165	100	160	9 - 17.6	
	140	63	35	283	151	165	100	160	9 - 17.6	
	160	20	32	234	156	165	76	130	9 - 17.6	
	160	25	32	234	156	165	76	130	9 - 17.6	
	160	32	32	234	156	165	76	130	9 - 17.6	
	160	40	32	234	161	165	76	130	9 - 17.6	
	160	50	35	283	161	165	100	160	9 - 17.6	
	160	63	35	283	161	165	100	160	9 - 17.6	
	180	20	32	244	166	165	71	130	9 - 26	
	180	25	32	244	166	165	71	130	9 - 26	
	180	32	32	244	166	165	76	130	9 - 26	
	180	40	32	244	171	165	76	130	9 - 26	
	180	50	35	293	171	165	100	160	9 - 26	
	180	63	35	293	171	165	100	160	9 - 26	
	200	20	32	254	176	165	76	130	9 - 26	
	200	25	32	254	176	165	71	130	9 - 26	
	200	32	32	254	176	165	76	130	9 - 26	
	200	40	32	254	181	165	76	130	9 - 26	
	200	50	35	303	181	165	100	160	9 - 26	
	200	63	35	303	181	165	100	160	9 - 26	
	225	20	32	266	188	165	71	130	11 - 26	
	225	25	32	266	188	165	71	130	11 - 26	
	225	32	32	266	188	165	76	130	11 - 26	
	225	40	32	266	193	165	76	130	11 - 26	
	225	50	35	315	193	165	100	160	11 - 26	
	225	63	35	315	193	165	100	160	11 - 26	
	250	20	32	279	201	165	76	130	11 - 26	
	250	25	32	279	201	165	76	130	11 - 26	
	250	32	32	279	201	165	76	130	11 - 26	
	250	40	32	279	206	165	76	160	11 - 26	
	250	50	35	328	206	165	100	160	11 - 26	
	250	63	35	328	206	165	100	160	11 - 26	
*	280	32	35	343	206	165	100	160	11 - 26	yes
*	280	40	35	343	206	165	100	160	11 - 26	yes
*	280	50	35	343	206	165	100	160	11 - 26	yes
*	280	63	35	343	206	165	100	160	11 - 26	yes
*	315 - 355	32	35	381	206	165	100	160	17 - 33	yes
*	315 - 355	40	35	381	206	165	100	160	17 - 33	yes
*	315 - 355	50	35	381	206	165	100	160	17 - 33	yes
*	315 - 355	63	35	381	206	165	100	160	17 - 33	yes

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail: info.ps@georgfischer.com Internet: <http://www.gfps.com>