
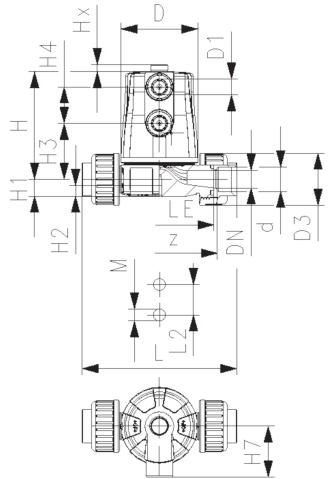




PROGEF Standard Diaphragm valve type 604 Unions with fusion socket metric

Model:

- Material: PP-H
- Compact full plastic design without screws
- High flow rate
- Actuator housing with thread for easy maintenance
- Quick opening & closing times
- For easy installation and removal
- Market standard installation length

Option:

- Individual configuration of the valve

* O-Ring material: FKM

d (mm)	DN (mm)	Size (inch)	PN (bar)	kv-value ($\Delta p=1$ bar) (L/min)	Actuator	EPDM Code	FKM Code	Weight (kg)
20	15	½	6	125	FC	167 604 012	167 604 062	0.35
20	15	½	6	125	FO	167 604 014	167 604 064	0.32
20	15	½	6	125	DA	167 604 015	167 604 065	0.30

d (mm)	PTFE/ EPDM* Code
20	167 604 032
20	167 604 034
20	167 604 035

d (mm)	D (mm)	D1_G (inch)	D3 (mm)	H (mm)	H1 (mm)	H2 (mm)	H3 (mm)	H4 (mm)	H7 (mm)	L (mm)	L2 (mm)	M	z (mm)	Lift = Hx (mm)	LE (mm)
20	65	¼	48	89	14	12	46	30	42	128	25	M6	96	6	90
20	65	¼	48	89	14	12	46	30	42	128	25	M6	96	6	90
20	65	¼	48	89	14	12	46	30	42	128	25	M6	96	6	90

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:
info.ps@georgfischer.com Internet: <http://www.gfps.com>