



SYGEF Plus Pressure retaining valve type 586
Unions with butt fusion spigots metric
Without manometer



Model:

- Diaphragm PTFE/EPDM
- Integrated stainless steel mounting inserts
- 0.5-9.0 bar (7-130 psi)

0.3-3.0 bar (4-44 psi) on request
 Manometer on request

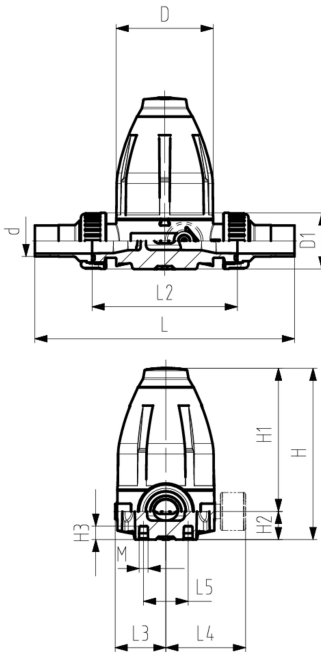

d (mm)	DN (mm)	PN (bar)	O-rings FKM Code
20	15	10	180 586 512
25	20	10	180 586 513
32	25	10	180 586 514
40	32	10	180 586 515
50	40	10	180 586 516
63	50	10	180 586 517

d (mm)	D (mm)	H (mm)	H1 (mm)	H2 (mm)	H3 (mm)	L (mm)	L2 (mm)	L3 (mm)	L5 (mm)	M	closest inch (inch)
20	79	132	111	21	12	226	120	42	40	M6	1/2
25	100	177	148	29	14	262	150	53	46	M6	3/4
32	100	177	148	29	14	268	150	53	46	M6	1
40	147	251	207	44	21	329	205	76	65	M8	1 1/4
50	147	251	207	44	21	335	205	76	65	M8	1 1/2
63	147	251	207	44	21	341	205	76	65	M8	2

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:
 info.ps@georgfischer.com Internet: <http://www.gfps.com>