


INSTAFLEX Té 90° électrosoudable réduit PB

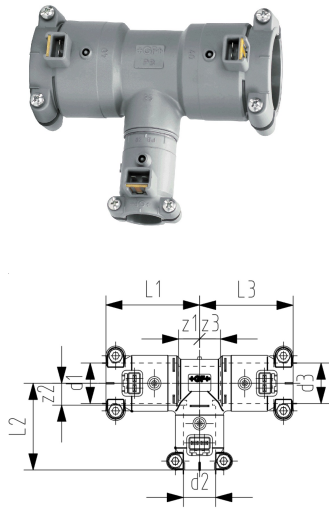

d1 (mm)	d2 (mm)	d3 (mm)	Code	CAN	SP	Poids (kg)	L1 (mm)	L2 (mm)	L3 (mm)	z1 (mm)	z2 (mm)	z3 (mm)
20	16	16	761 069 249	442 132	1	0.058	54	47	47	14	10	10
20	16	20	761 069 250		1	0.041	54	49	54	14	11	14
25	16	25	761 069 251	442 133	1	0.082	58	54	58	16	16	16
25	20	20	761 069 256		1	0.079	58	54	54	16	14	14
25	20	25	761 069 252		1	0.079	58	54	58	16	14	16
25	25	20	761 069 257		1	0.081	58	58	54	16	16	14
32	20	32	761 069 253	442 134	1	0.088	60	58	60	18	18	18
32	25	25	761 069 258		1	0.098	60	58	58	18	16	16
32	25	32	761 069 254		1	0.095	60	58	60	18	16	18
40	20	40	761 069 259	442 135	1	0.157	69	63	69	22	23	22
40	25	40	761 069 255		1	0.170	69	63	69	22	21	22
40	32	40	761 069 260		1	0.168	69	63	69	22	21	22
50	25	50	761 069 261	442 136	1	0.246	78	72	78	29	30	29
50	32	50	761 069 262	442 137	1	0.260	78	72	78	29	30	29
63	25	63	761 069 263		1	0.360	86	81	86	36	39	36
63	40	63	761 069 264		1	0.384	86	85	86	36	38	36

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:
info.ps@georgfischer.com Internet: <http://www.gfps.com>