


PROGEF Standard Check valve type 562
With fusion sockets metric

Model:

- Material: PP-H
- For horizontal or vertical installation
- Sealing at a minimum water column of 1m
- Spring loaded, spring made of stainless steel (1.4310)
- Spring available in other materials, see spare parts
- Designed for easy installation and removal
- Vibration free even at high flow velocity
- Flow-optimized return cone, double guided
- Compact installation length, same as ball valve type 546
- Z-length, end connectors and union nuts **not** compatible with type 360
- New DN65-DN100

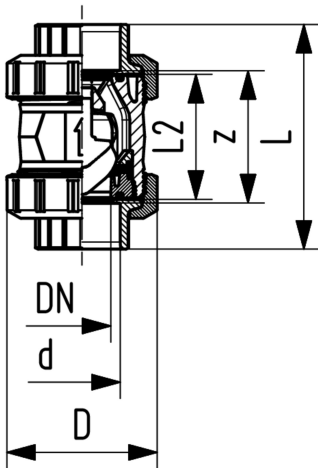

d (mm)	EPDM Code	FKM Code
16	167 562 001	167 562 011
20	167 562 002	167 562 012
25	167 562 003	167 562 013
32	167 562 004	167 562 014
40	167 562 005	167 562 015
50	167 562 006	167 562 016
63	167 562 007	167 562 017
75	167 562 008	167 562 018
90	167 562 009	167 562 019
110	167 562 010	167 562 020

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:
info.ps@georgfischer.com Internet: <http://www.gfps.com>