


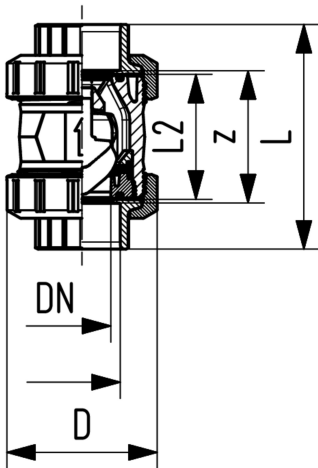

Check valve type 562 PVC-U
With solvent cement sockets Inch ASTM
Inclusive 2 threaded valve ends NPT

Model:

- For horizontal or vertical installation
- Sealing at a minimum water column of 1m
- Spring loaded, spring made of stainless steel (1.4310)
- Spring available in other materials, see spare parts
- Designed for easy installation and removal
- Vibration free even at high flow velocity
- Flow-optimised return cone, double guided
- Compact installation length, same as ball valve type 546
- Z-length, end connectors and union nuts **not** compatible with type 360
- New DN65-DN100

NPT (inch)	DN (mm)	PN (bar)	kv-value ($\Delta p=1$ bar) (l/min)	EPDM Code	SP	Weight (kg)	FKM Code	SP	Weight (kg)
3/8	10	16	190	161 562 101	1	0.130	161 562 111	1	0.130
1/2	15	16	180	161 562 102	1	0.130	161 562 112	1	0.130
3/4	20	16	380	161 562 103	1	0.260	161 562 113	1	0.280
1	25	16	460	161 562 104	1	0.300	161 562 114	1	0.300
1 1/4	32	16	850	161 562 105	1	0.510	161 562 115	1	0.510
1 1/2	40	16	1080	161 562 106	1	0.750	161 562 116	1	0.760
2	50	16	1670	161 562 107	1	1.330	161 562 117	1	1.330
2 1/2	65	16	2950	161 562 108	1	3.230	161 562 118	1	3.250
3	80	16	3600	161 562 109	1	5.080	161 562 119	1	5.100
4	100	16	4150	161 562 110	1	8.150	161 562 120	1	8.190

NPT (inch)	D (mm)	L (mm)	L2 (mm)	z (mm)
3/8	50	105	56	67
1/2	50	105	56	61
3/4	58	121	65	70
1	68	133	71	76
1 1/4	84	154	85	90
1 1/2	97	164	89	94
2	124	183	101	107
2 1/2	166	233	136	144
3	200	254	141	151
4	238	301	164	174

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:
 info.ps@georgfischer.com Internet: <http://www.gfps.com>