


MULTI/JOINT® 3207 Plus Wide Range end cap threaded, restraint, Uni/Fiksers/A4

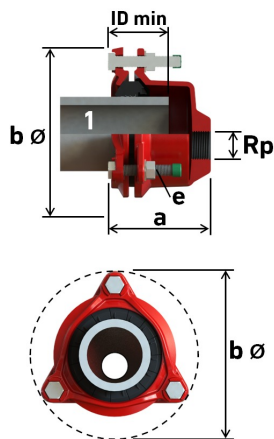

Model:

- Suitable for all kinds of pipe material
- Suitable for water and gas (EPDM only for potable water)
- Ductile iron GGG45 body and clamping ring(s), acc. to EN-GJS-450-10
- RESICOAT® epoxy powder coating, according to GSK standards and EN 14901
- NBR or EPDM gasket, NBR acc. to EN 682 (-5°C up to +50°C), EPDM acc. to EN 681-1 (0°C up to +50°C)
- Angular deflection of max. 8° per socket at installation (based on the middle of the range)
- Stainless steel A4 quality (AISI 316) Uni/Fiksers
- Stainless steel A2 quality (AISI 304) or A4 quality (AISI 316) bolts, nuts and washers
- Hygiene protection included DN50 - DN1025

Installation instruction:

- Read the user manual
- For restraint versions, on plastic pipes, the use of an insert stiffener (see accessories) is mandatory, check our technical information
- * DN350 & DN400 for plastic pipe materials = PN 10 bar water / MOP 5 bar gas

Note:

ID min. = minimum insertion depth

DN (mm)	Thread Type	Size (inch)	Range 1 (mm)	NBR / A4 Code	EPDM / A4 Code	Weight (kg)
50	Rp	¾	46 - 71	709 385 004	709 385 304	3.100
50	Rp	1	46 - 71	709 385 005	709 385 305	3.100
50	Rp	1 ¼	46 - 71	709 385 006	709 385 306	3.100
50	Rp	1 ½	46 - 71	709 385 007	709 385 307	3.100
50	Rp	2	46 - 71	709 385 008	709 385 308	3.100
65	Rp	¾	63 - 90	709 385 009	709 385 309	4.800
65	Rp	1	63 - 90	709 385 010	709 385 310	4.800
65	Rp	1 ¼	63 - 90	709 385 011	709 385 311	4.800
65	Rp	1 ½	63 - 90	709 385 012	709 385 312	4.800
65	Rp	2	63 - 90	709 385 013	709 385 313	4.400
80	Rp	¾	84 - 105	709 385 014	709 385 314	6.500
80	Rp	1	84 - 105	709 385 015	709 385 315	6.500
80	Rp	1 ¼	84 - 105	709 385 016	709 385 316	6.500
80	Rp	1 ½	84 - 105	709 385 017	709 385 317	6.500
80	Rp	2	84 - 105	709 385 018	709 385 318	5.200
100	Rp	¾	104 - 132	709 385 019	709 385 319	8.000
100	Rp	1	104 - 132	709 385 020	709 385 320	8.000
100	Rp	1 ¼	104 - 132	709 385 021	709 385 321	8.000
100	Rp	1 ½	104 - 132	709 385 022	709 385 322	8.000
100	Rp	2	104 - 132	709 385 023	709 385 323	8.000
125	Rp	¾	132 - 155	709 385 024	709 385 324	7.900
125	Rp	1	132 - 155	709 385 025	709 385 325	7.900
125	Rp	1 ¼	132 - 155	709 385 026	709 385 326	7.900
125	Rp	1 ½	132 - 155	709 385 027	709 385 327	7.900
125	Rp	2	132 - 155	709 385 028	709 385 328	7.900
150	Rp	¾	154 - 192	709 385 029	709 385 329	10.700
150	Rp	1	154 - 192	709 385 030	709 385 330	10.700
150	Rp	1 ¼	154 - 192	709 385 031	709 385 331	10.700
150	Rp	1 ½	154 - 192	709 385 032	709 385 332	10.700
150	Rp	2	154 - 192	709 385 033	709 385 333	10.700
200	Rp	¾	192 - 232	709 385 034	709 385 334	16.800
200	Rp	1	192 - 232	709 385 035	709 385 335	16.800
200	Rp	1 ¼	192 - 232	709 385 036	709 385 336	16.800
200	Rp	1 ½	192 - 232	709 385 037	709 385 337	16.800
200	Rp	2	192 - 232	709 385 038	709 385 338	17.500
225	Rp	¾	230 - 268	709 385 049	709 385 349	27.100
225	Rp	1	230 - 268	709 385 050	709 385 350	27.100
225	Rp	1 ¼	230 - 268	709 385 051	709 385 351	27.100

Data sheet

valid from: 6/23/25



DN (mm)	Thread Type	Size (inch)	Range 1 (mm)	NBR / A4 Code	EPDM / A4 Code	Weight (kg)
225	Rp	1 ½	230 - 268	709 385 052	709 385 352	27.100
225	Rp	2	230 - 268	709 385 053	709 385 353	25.700
250	Rp	¾	267 - 310	709 385 039	709 385 339	37.600
250	Rp	1	267 - 310	709 385 040	709 385 340	37.600
250	Rp	1 ¼	267 - 310	709 385 041	709 385 341	37.600
250	Rp	1 ½	267 - 310	709 385 042	709 385 342	37.600
250	Rp	2	267 - 310	709 385 043	709 385 343	27.700
300	Rp	¾	315 - 356	709 385 044	709 385 344	47.700
300	Rp	1	315 - 356	709 385 045	709 385 345	47.700
300	Rp	1 ¼	315 - 356	709 385 046	709 385 346	47.700
300	Rp	1 ½	315 - 356	709 385 047	709 385 347	47.700
300	Rp	2	315 - 356	709 385 048	709 385 348	34.100
400	Rp	¾	392 - 433	709 385 054	709 385 354	45.100
400	Rp	1	392 - 433	709 385 055	709 385 355	45.100
400	Rp	1 ¼	392 - 433	709 385 056	709 385 356	45.100
400	Rp	1 ½	392 - 433	709 385 057	709 385 357	45.100
400	Rp	2	392 - 433	709 385 058	709 385 358	45.100

DN (mm)	Min. (mm)	Max. (mm)	b ID min. (mm)	e (mm)	M	PN Water (bar)	MOP Gas (bar)	
50	125	147	170	84	3	M12	16	8
50	125	147	170	84	3	M12	16	8
50	125	147	170	84	3	M12	16	8
50	125	147	170	84	3	M12	16	8
50	125	147	170	84	3	M12	16	8
65	133	156	191	84	3	M12	16	8
65	133	156	191	84	3	M12	16	8
65	133	156	191	84	3	M12	16	8
65	133	156	191	84	3	M12	16	8
65	133	156	191	84	3	M12	16	8
80	135	157	210	84	3	M12	16	8
80	135	157	210	84	3	M12	16	8
80	135	157	210	84	3	M12	16	8
80	135	157	210	84	3	M12	16	8
80	135	157	210	84	3	M12	16	8
100	143	169	241	90	3	M16	16	8
100	143	169	241	90	3	M16	16	8
100	143	169	241	90	3	M16	16	8
100	143	169	241	90	3	M16	16	8
100	143	169	241	90	3	M16	16	8
125	149	172	270	90	4	M16	16	8
125	149	172	270	90	4	M16	16	8
125	149	172	270	90	4	M16	16	8
125	149	172	270	90	4	M16	16	8
125	149	172	270	90	4	M16	16	8
150	169	206	312	110	4	M16	16	8
150	169	206	312	110	4	M16	16	8
150	169	206	312	110	4	M16	16	8
150	169	206	312	110	4	M16	16	8
150	169	206	312	110	4	M16	16	8
200	183	220	371	110	6	M16	16	8
200	183	220	371	110	6	M16	16	8
200	183	220	371	110	6	M16	16	8
200	183	220	371	110	6	M16	16	8
200	183	220	371	110	6	M16	16	8
225	216	254	415	125	6	M20	16	8
225	216	254	415	125	6	M20	16	8
225	216	254	415	125	6	M20	16	8
225	216	254	415	125	6	M20	16	8

Data sheet

valid from: 6/23/25



DN	Min.	Max.	b	ID min.	e	M	PN Water	MOP Gas
(mm)	(mm)	(mm)	(mm)	(mm)	(mm)		(bar)	(bar)
225	216	254	415	125	6	M20	16	8
250	225	268	445	130	6	M20	16	8
250	225	268	445	130	6	M20	16	8
250	225	268	445	130	6	M20	16	8
250	225	268	445	130	6	M20	16	8
250	225	268	445	130	6	M20	16	8
300	238	276	495	130	8	M20	16	8
300	238	276	495	130	8	M20	16	8
300	238	276	495	130	8	M20	16	8
300	238	276	495	130	8	M20	16	8
300	238	276	495	130	8	M20	16	8
400	261	303	580	135	10	M20	16*	8*
400	261	303	580	135	10	M20	16*	8*
400	261	303	580	135	10	M20	16*	8*
400	261	303	580	135	10	M20	16*	8*

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:
info.ps@georgfischer.com Internet: <http://www.gfps.com>