
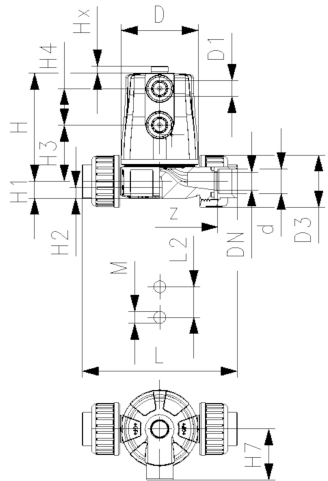




SYGEF Standard
Diaphragm valve type 604
Unions with butt fusion spigot metric

Model:

- Material: PVDF
- Compact full plastic design without screws
- High flow rate
- Actuator housing with thread for easy maintenance
- Quick opening & closing times
- For easy installation and removal
- Market standard installation length

Option:

- Individual configuration of the valve

* O-Ring material: FKM

d (mm)	DN (mm)	PN (bar)	kv-value ($\Delta p=1$ bar) (L/min)	Actuator	FKM Code	Weight (kg)	PTFE/EPDM Code
20	15	6	125	FC	185 604 162	0.45	185 604 132
20	15	6	125	FO	185 604 164	0.42	185 604 134
20	15	6	125	DA	185 604 165	0.40	185 604 135

D	D1_G	D3	H	H1	H2	H3	H4	H7	L	L2	M	z	Lift = Hx
(mm)	(inch)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)
65	1/4	43	89	14	12	46	30	42	196	25	M6	100	6
65	1/4	43	89	14	12	46	30	42	196	25	M6	100	6
65	1/4	43	89	14	12	46	30	42	196	25	M6	100	6

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:
 info.ps@georgfischer.com Internet: <http://www.gfps.com>