


SYGEF Plus
Pressure reducing valve type 582
With butt fusion spigots metric
Without manometer

Model:

- Diaphragm PTFE/EPDM
- Integrated stainless steel mounting inserts
- 0.5-9.0 bar (7-130 psi)

0.3-3.0 bar (4-44 psi) on request

Manometer on request

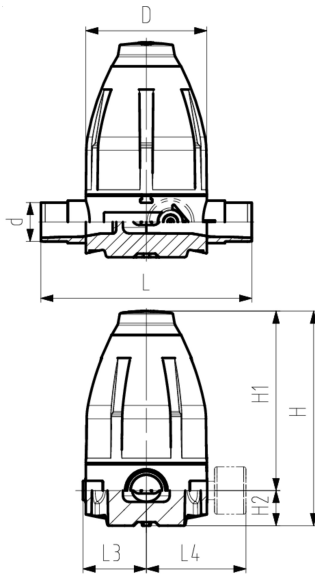

d	DN	Size	PN	weight	SP	GP	O-rings FKM Code
(mm)	(mm)	(inch)	(bar)	(kg)			
20	15	½	10				180 582 012
25	20	¾	10				180 582 013
32	25	1	10				180 582 014
40	32	1 ¼	10				180 582 015
50	40	1 ½	10				180 582 016
63	50	2	10				180 582 017

d	D	H	H1	H2	H3	L	L3	M	closest inch
(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)		(inch)
20	79	132	111	21	14	150	42	M6	½
25	100	177	148	29	14	190	53	M6	¾
32	100	177	148	29	14	190	53	M6	1
40	147	251	207	44	21	240	76	M8	1 ¼
50	147	251	207	44	21	240	76	M8	1 ½
63	147	251	207	44	21	260	76	M8	2

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:
 info.ps@georgfischer.com Internet: <http://www.gfps.com>