


PROGEF Standard Check valve type 561
Without spring
With threaded sockets reinforced NPT

Model:

- Material: PP-H
- Sealing at a minimum water column of 2 m
- Designed for easy installation and removal
- Vibration free even at high flow velocity
- Flow-optimized return cone, double guided
- For vertical installation
- Compact installation length, same as ball valve type 546
- Z-length, end connectors and union nuts **not** compatible with type 360

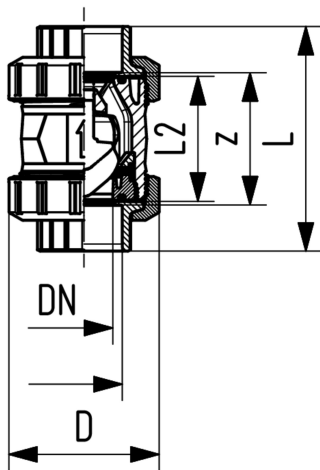

d (mm)	DN (mm)	Thread Type	Size (inch)	PN (bar)	kv-value ($\Delta p=1$ bar) (L/min)	EPDM Code	Weight (kg)	FKM Code	Weight (kg)
16	10	NPT	$\frac{3}{8}$	10	190	167 561 101	0.080	167 561 111	0.080
20	15	NPT	$\frac{1}{2}$	10	180	167 561 102	0.090	167 561 112	0.090
25	20	NPT	$\frac{3}{4}$	10	380	167 561 103	0.170	167 561 113	0.180
32	25	NPT	1	10	460	167 561 104	0.200	167 561 114	0.210
40	32	NPT	1 $\frac{1}{4}$	10	850	167 561 105	0.350	167 561 115	0.360
50	40	NPT	1 $\frac{1}{2}$	10	1080	167 561 106	0.500	167 561 116	0.510
63	50	NPT	2	10	1670	167 561 107	0.920	167 561 117	0.920

D (mm)	L (mm)	L2 (mm)	z (mm)
50	96	56	71
50	99	56	64
58	111	65	76
68	127	71	83
84	146	85	100
97	157	89	111
124	183	101	134

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:
 info.ps@georgfischer.com Internet: <http://www.gfps.com>