


PROGEF 标准型
PP-H 气动蝶阀 244型
DA (双作用)
凸耳式 美标法兰 ANSI/ASME

型号:

- (阀体) 外壳材质: PP-GF30, SS316凸耳内嵌
- 控制范围: 90°<
- 总长度符合EN 558, ISO 5752标准
- 连接尺寸: ANSI/ASME B 16.5 Class 150

选项:

- 可选项: 位置反馈及限位开关 (限位开关需要单独采购)

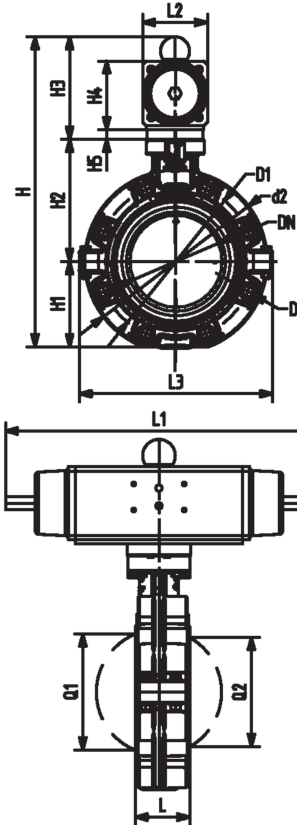

d (mm)	Size (inch)	DN (mm)	PN (bar)	kv-value ($\Delta p=1$ bar) (l/min)	EPDM code	FKM code
63	2	50	10	740	199 244 362	199 244 382
75	2 1/2	65	10	1500	199 244 363	199 244 383
90	3	80	10	2400	199 244 364	199 244 384
110	4	100	10	3800	199 244 365	199 244 385
140	5	125	10	8600	199 244 366	199 244 386
160	6	150	10	11400	199 244 367	199 244 387
225	8	200	10	19900	199 244 368	199 244 388
280	10	250	8	34000	199 244 369	199 244 389
315	12	300	5	50000	199 244 370	199 244 390

d (mm)	Size (inch)	Type of actuator	d2 (mm)	d2 (mm)	D1 (mm)	H (mm)	H1 (mm)	H2 (mm)	H3 (mm)	H4 (mm)	H5 (mm)	L (mm)
63	2	PA-35 DA	160	UNC 5/8	120,6	318	77	134	107	60	15	45
75	2 1/2	PA-35 DA	180	UNC 5/8	139,7	330	83	140	107	60	15	46
90	3	PA-40 DA	195	UNC 5/8	152,4	348	89	146	113	66	15	49
110	4	PA-45 DA	226	UNC 5/8	190,5	384	104	167	111	78		56
140	5	PA-45 DA	258	UNC 3/4	215,9	413	121	181	111	78		64
160	6	PA-55 DA	284	UNC 3/4	241,3	461	133	189	139	96		72
225	8	PA-55 DA	341	UNC 3/4	298,4	508	159	210	139	96		73
280	10	PA-65 DA	412	UNC 7/8	362,0	630	205	264	161	118		113
315	12	PA-70 DA	482	UNC 7/8	431,8	692	234	285	173	130		113

d (mm)	Size (inch)	L1 (mm)	L2 (mm)	L3 (mm)	Q1 (mm)	Q2 (mm)
63	2	177	55	165	40	
75	2 1/2	177	55	182	54	35
90	3	190	60	210	67	50
110	4	235	72	240	88	74
140	5	235	72	272	113	97
160	6	279	90	300	139	123
225	8	279	90	360	178	169
280	10	350	112	440	210	207
315	12	381	124	510	256	253

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111e-mail:
 info.ps@georgfischer.com Internet: <http://www.gfps.com>