
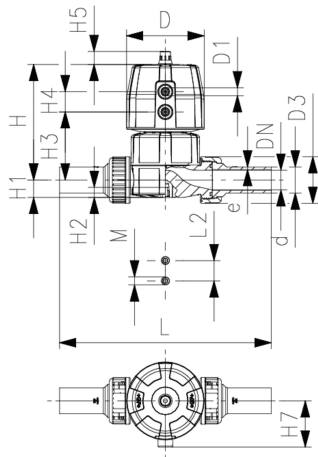




**SYGEF Plus Diaphragm valve DIASTAR Ten
FC (Fail safe to close)
Unions with butt fusion spigots metric**

Model:

- Material: PVDF-HP
- Double flow rate compared to predecessor
- One housing nut replaces four screws
- For easy installation and removal
- Short overall length

Option:

- Individual configuration of the valve

*O-ring material: FKM white

d (mm)	DN (mm)	PN (bar)	Cv-value (l/min)	PTFE/EPDM Code	weight (kg)	PTFE/FKM Code	weight (kg)
20	15	10	125	180 624 132	0.761	180 624 152	1.100
25	20	10	271	180 624 133	1.201	180 624 153	1.760
32	25	10	481	180 624 134	1.563	180 624 154	2.610
40	32	10	759	180 624 135	2.623	180 624 155	3.760
50	40	10	1263	180 624 136	4.323	180 624 156	6.220
63	50	6	1728	180 624 137	5.365	180 624 157	7.800

d (mm)	D (mm)	D1_G (inch)	H (mm)	H1 (mm)	H2 (mm)	H3 (mm)	H4 (mm)	H5 (mm)	H7 (mm)	L (mm)	L2 (mm)	M (mm)	e (mm)	Lift = Hx (mm)
20	68	⅝	101	14	12	60	24	16	43	196	25	M6	1.9	7
25	96	⅝	132	18	12	73	25	16	57	221	25	M6	1.9	10
32	96	⅝	143	22	12	84	25	16	57	234	25	M6	2.4	13
40	120	⅝	173	26	15	99	26	26	69	260	45	M8	2.4	15
50	150	⅝	214	32	15	119	36	26	88	284	45	M8	3.0	19
63	150	⅝	226	39	15	132	36	26	88	321	45	M8	3.0	23

d (mm)	closest inch (inch)
20	⅜
25	⅜
32	1
40	1 ¼
50	1 ½
63	2

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:
info.ps@georgfischer.com Internet: <http://www.gfps.com>