



instrumentenaansluitfitting, SYGEF® Plus, PVDF-HP, PN16

Uitvoering:


- materiaal: PVDF-HP
- spuitgietuitvoering

toepassing:

- compatibel met alle Signet sensoren m.u.v. flowsensoren

opmerking:

Thread needs to be milled, HAND HELD DRILLING MUST NOT BE DONE

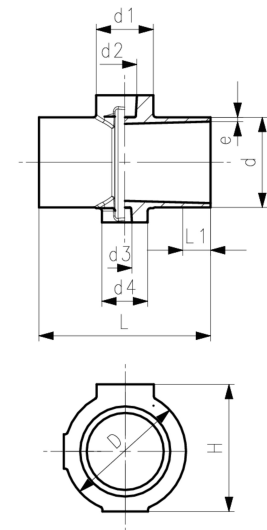

d	PN	FM	Rp/NPT	code	gewicht
(mm)	(bar)		(inch)		(kg)
63	16	WNF, IR	¼ - ¾	735 918 811	0,147
75	16	WNF, IR	¼ - ¾	735 918 812	0,210
90	16	WNF, IR	¼ - ¾	735 918 813	0,265
110	16	WNF, IR	¼ - ¾	735 918 814	0,623
140	16	IR	¼ - 1	735 918 816	1,319
160	16	IR	¼ - 1	735 918 817	1,601
225	16	IR	¼ - 1	735 918 820	2,698

d	L	L1	d1	d2	d3	d4	D	H	e
(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)
63	120	25	40	17	10	32	85	89	3,0
75	130	25	40	17	10	40	96	101	3,6
90	130	25	40	17	10	40	110	116	4,3
110	130	25	40	17	10	40	127	136	5,3
140	155	40	63	17	10	50	171	171	6,7
160	155	40	63	17	10	50	189	191	7,7
225	155	40	63	17	10	50	248	256	10,8

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail: info.ps@georgfischer.com Internet: <http://www.gfps.com>