




**SYGEF Standard check valve type 562**  
With threaded sockets NPT

**Model:**

- Material: PVDF
- For horizontal or vertical installation
- Sealing at a minimum water column of 1 m
- Spring loaded, spring made of stainless steel (1.4310)
- Spring available in other materials, see spare parts
- Designed for easy installation and removal
- Vibration free even at high flow velocity
- Flow-optimized return cone, double guided
- Compact installation length, same as ball valve type 546
- Z-length, end connectors and union nuts **not** compatible with type 360

Warning: please make sure the diameter is not reduced through welding beads (Danger of turbulences)

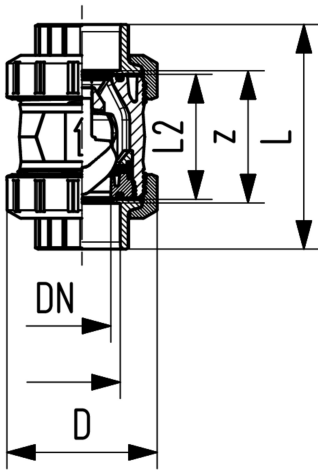

d	NPT	DN	PN	kv-value	FKM	SP	Weight	D	L	L2	z
(mm)	(inch)	(mm)	(bar)	( $\Delta p=1$ bar)	Code		(kg)	(mm)	(mm)	(mm)	(mm)
				(L/min)							
16	¾	10	10	190	<b>175 562 111</b>	1	0.150	50	96	56	69
20	½	15	10	180	<b>175 562 112</b>	1	0.160	50	99	56	64
25	¾	20	10	380	<b>175 562 113</b>	1	0.350	58	111	65	76
32	1	25	10	460	<b>175 562 114</b>	1	0.390	68	127	71	83
40	1 ¼	32	10	850	<b>175 562 115</b>	1	0.680	84	146	85	101
50	1 ½	40	10	1080	<b>175 562 116</b>	1	1.000	97	157	89	111
63	2	50	10	1670	<b>175 562 117</b>	1	1.770	124	183	101	135

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail: info.ps@georgfischer.com Internet: <http://www.gfps.com>