


## Check valve type 561 ABS With threaded sockets Rp

### Model:

- Sealing at a minimum water column of 2m
- Designed for easy installation and removal
- Vibration free even at high flow velocity
- Flow-optimized return cone, double guided
- For vertical installation
- Compact installation length, same as ball valve type 546
- Z-length, end connectors and union nuts **not** compatible with type 360

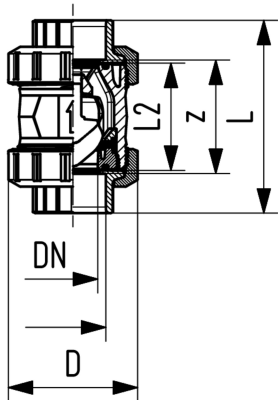

| d<br>(mm) | DN<br>(mm) | Thread Type | Size<br>(inch)  | PN<br>(bar) | kv-value<br>( $\Delta p=1$ bar)<br>(l/min) | EPDM<br>Code       | SP | Weight<br>(kg) |
|-----------|------------|-------------|-----------------|-------------|--------------------------------------------|--------------------|----|----------------|
| 16        | 10         | Rp          | $\frac{3}{8}$   | 10          | 190                                        | <b>169 561 021</b> | 1  | 0.090          |
| 20        | 15         | Rp          | $\frac{1}{2}$   | 10          | 180                                        | <b>169 561 022</b> | 1  | 0.100          |
| 25        | 20         | Rp          | $\frac{3}{4}$   | 10          | 380                                        | <b>169 561 023</b> | 1  | 0.200          |
| 32        | 25         | Rp          | 1               | 10          | 460                                        | <b>169 561 024</b> | 1  | 0.220          |
| 40        | 32         | Rp          | 1 $\frac{1}{4}$ | 10          | 850                                        | <b>169 561 025</b> | 1  | 0.380          |
| 50        | 40         | Rp          | 1 $\frac{1}{2}$ | 10          | 1080                                       | <b>169 561 026</b> | 1  | 0.580          |
| 63        | 50         | Rp          | 2               | 10          | 1670                                       | <b>169 561 027</b> | 1  | 1.040          |

| D<br>(mm) | L<br>(mm) | L2<br>(mm) | z<br>(mm) |
|-----------|-----------|------------|-----------|
| 50        | 95        | 56         | 69        |
| 50        | 100       | 56         | 67        |
| 58        | 114       | 65         | 78        |
| 68        | 127       | 71         | 85        |
| 84        | 146       | 85         | 100       |
| 97        | 152       | 89         | 106       |
| 124       | 177       | 101        | 121       |

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail: info.ps@georgfischer.com Internet: <http://www.gfps.com>