








3-Way ball valve type 543 Pro PVC-U
Horizontal/L-port 24V
With manual emergency override
With solvent cement sockets metric
With electric actuator EA15

Model:

- Voltage 24V AC/DC
- Factory set control range 90°<
- Basic position A-C opened, activated position B-C opened, see flow scheme
- Other positions possible by adjusting the limit switches
- Heating element, position feedback (Open/Close)
- Integrated stainless steel mounting inserts

Option:

- Optional accessories: Fail-safe return unit, Monitoring board, Position controller, Profibus DP board

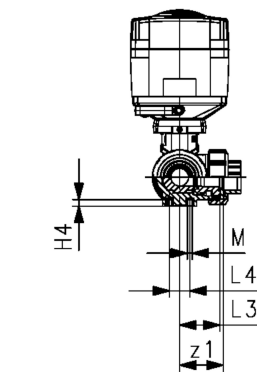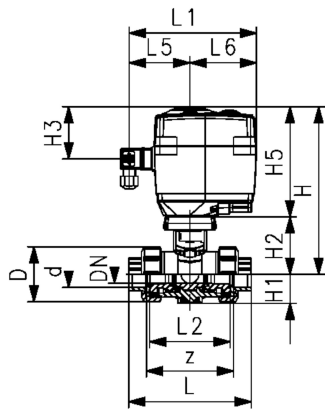

d	DN	Size	PN	kv-value	EA	EPDM	Weight	FKM	Weight
(mm)	(mm)	(inch)	(bar)	(Δp=1 bar)		Code	(kg)	Code	(kg)
				(l/min)					
16	10	3/8	10	140	EA15	199 197 202	2.122	199 197 212	2.122
20	15	1/2	10	200	EA15	199 197 203	2.128	199 197 213	2.128
25	20	3/4	10	470	EA15	199 197 204	2.256	199 197 214	2.256
32	25	1	10	793	EA15	199 197 205	2.446	199 197 215	2.446
40	32	1 1/4	10	1290	EA15	199 197 206	2.870	199 197 216	2.870
50	40	1 1/2	10	1910	EA15	199 197 207	3.698	199 197 217	3.322
63	50	2	10	3100	EA15	199 197 208	5.018	199 197 218	4.683

d	D	H	H1	H2	H3	H5	H6	L	L1	L2	L3	L4	L5	L6	L7
(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)
16	50	231	28	64	94	167	8	109	180	73	36	25	97	83	122
20	50	231	28	64	94	167	8	112	180	73	36	25	97	83	122
25	58	240	32	73	94	167	8	131	180	86	43	25	97	83	122
32	68	240	36	73	94	167	8	151	180	99	50	25	97	83	122
40	84	251	45	84	94	167	9	181	180	120	60	45	97	83	122
50	97	251	51	84	94	167	9	205	180	137	69	45	97	83	122
63	124	273	65	106	94	167	9	261	180	179	89	45	97	83	122

d	L8	M	z	z1	closest
(mm)	(mm)		(mm)	(mm)	inch
					(inch)
16	33	6	81	40	3/8
20	33	6	81	40	1/2
25	33	6	94	47	3/4
32	33	6	107	54	1
40	33	8	130	65	1 1/4
50	33	8	143	72	1 1/2
63	33	8	185	92	2

Data sheet

valid from: 3/25/25



The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:
info.ps@georgfischer.com Internet: <http://www.gfps.com>