


SYGEF Standard Diaphragm valve type 515 With butt fusion spigots metric

Model:

- Material: PVDF
- Double flow rate compared to predecessor
- One housing nut replaces four screws
- Handwheel with built-in locking mechanism
- Overall length EN 558

Option:

- Individual configuration of the valve
- Self adjusting multifunctional module with integrated limit switches

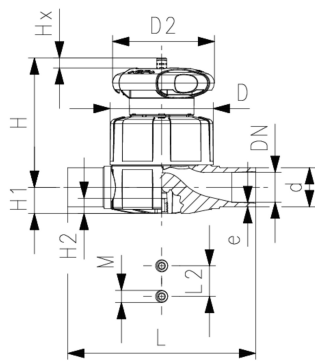

d (mm)	PTFE/EPDM Code	weight (lb)
20	185 515 132	0.617
25	185 515 133	1.133
32	185 515 134	1.493
40	185 515 135	2.077
50	185 515 136	5.494
63	185 515 137	5.434

d (mm)	D (mm)	D2 (mm)	L (mm)	L2 (mm)	H (mm)	H1 (mm)	H2 (mm)	M	Lift = Hx (mm)	e (mm)	closest inch (inch)
20	65	65	124	25	73	14	12	M6	7	1.9	½
25	80	65	144	25	81	18	12	M6	10	1.9	¾
32	88	87	155	25	107	22	12	M6	13	2.4	1
40	101	87	176	45	115	26	15	M8	15	2.4	1 ¼
50	117	135	193	45	148	32	15	M8	19	3.0	1 ½
63	144	135	223	45	166	39	15	M8	25	3.0	2

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:
info.ps@georgfischer.com Internet: <http://www.gfps.com>