




Tapping saddle d63-400 With 360° rotatable outlet



- 10 bar Gas / 16 bar Water
 - With integrated cutter to tap live mains under pressure
 - Complete with lower part
 - 4mm pin connectors
 - Limited path fusion indicators
 - Long fusion outlet
 - O-ring-sealed screw cap
 - d355-400mm. Not suitable for pipes if wall thickness is larger than SDR17 pipes.
- * Topload: delivery without lower part for assembling as Topload with tool no. 799.350.477; angle adaptor (799.350.340) for fusion cable required

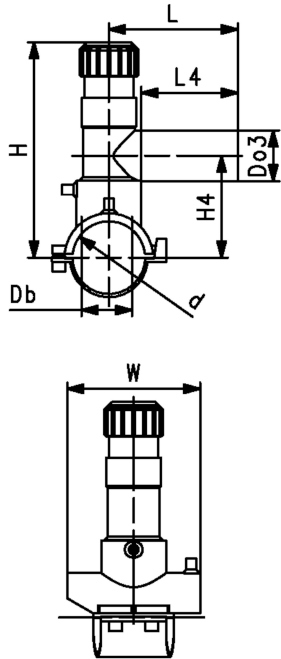

	d (mm)	Do3 (mm)	DN (mm)	PN (bar)	Code	Weight (kg)
	63	20	50	16	193 131 402	0.697
	63	25	50	16	193 131 403	0.637
	63	32	50	16	193 131 404	0.701
	63	40	50	16	193 131 405	0.718
	63	63	50	16	193 131 437	1.426
	75	20	65	16	193 131 442	0.831
	75	25	65	16	193 131 443	0.830
	75	32	65	16	193 131 444	0.812
	75	40	65	16	193 131 445	0.849
	75	63	65	16	193 131 447	1.549
	90	20	80	16	193 131 452	0.794
	90	25	80	16	193 131 453	0.790
	90	32	80	16	193 131 454	0.770
	90	40	80	16	193 131 455	0.811
	90	63	80	16	193 131 457	1.494
	110	20	100	16	193 131 462	0.826
	110	25	100	16	193 131 463	0.808
	110	32	100	16	193 131 464	0.831
	110	40	100	16	193 131 465	0.805
	110	63	100	16	193 131 467	1.097
	125	20	100	16	193 131 472	0.880
	125	25	100	16	193 131 473	0.878
	125	32	100	16	193 131 474	0.878
	125	40	100	16	193 131 475	0.874
	125	63	100	16	193 131 477	1.184
	140	20	125	16	193 131 482	0.887
	140	25	125	16	193 131 483	0.874
	140	32	125	16	193 131 484	0.894
	140	40	125	16	193 131 485	0.920
	140	63	125	16	193 131 487	1.180
	160	20	150	16	193 131 492	0.916
	160	25	150	16	193 131 493	0.912
	160	32	150	16	193 131 494	0.915
	160	40	150	16	193 131 495	0.936
	160	63	150	16	193 131 497	1.221
	180	20	150	16	193 131 502	0.994
	180	25	150	16	193 131 503	1.001
	180	32	150	16	193 131 504	0.957
	180	40	150	16	193 131 505	1.007
	180	63	150	16	193 131 507	1.587
	200	20	200	16	193 131 512	1.015
	200	25	200	16	193 131 513	1.015
	200	32	200	16	193 131 514	0.985
	200	40	200	16	193 131 515	1.024
	200	63	200	16	193 131 517	1.290
	225	20	200	16	193 131 522	1.016
	225	25	200	16	193 131 523	1.025

Data sheet

valid from: 1/24/25




	d	Do3	DN	PN	Code	Weight
	(mm)	(mm)	(mm)	(bar)		(kg)
	225	32	200	16	193 131 524	1.019
	225	40	200	16	193 131 525	1.029
	225	63	200	16	193 131 527	1.738
	250	20	250	16	193 131 532	1.025
	250	25	250	16	193 131 533	1.026
	250	32	250	16	193 131 534	0.996
	250	63	250	16	193 131 537	1.733
	250	40	250	16	193 131 535	1.008
	280	63	250	16	193 131 548	1.478
	315	63	300	16	193 131 558	1.481
Topload	355	63	350	16	193 131 557	1.481
Topload	400	63	400	16	193 131 577	1.473

	d	Do3	L	L4	Db	W	H	H4	SDR pipe
	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	
	63	20	130	71	32	164	186	108	9 - 11
	63	25	130	71	32	164	186	108	9 - 11
	63	32	130	76	32	164	186	108	9 - 11
	63	40	137	81	32	164	186	108	9 - 11
	63	63	160	100	32	164	134	112	9 - 11
	75	20	130	71	32	164	191	113	9 - 11
	75	25	130	71	32	164	191	113	9 - 11
	75	32	130	76	32	164	191	113	9 - 11
	75	40	137	81	32	164	191	113	9 - 11
	75	63	160	100	32	164	240	118	9 - 11
	90	20	130	71	32	164	199	121	9 - 11
	90	25	130	71	32	164	199	121	9 - 11
	90	32	130	76	32	164	199	121	9 - 11
	90	40	137	81	32	164	199	121	9 - 11
	90	63	160	100	35	164	248	126	9 - 11
	110	20	130	71	32	164	209	131	9 - 17.6
	110	25	130	71	32	164	209	131	9 - 17.6
	110	32	130	76	32	164	209	131	9 - 17.6
	110	40	137	81	32	164	209	131	9 - 17.6
	110	63	160	100	35	164	258	136	9 - 17.6
	125	20	130	71	32	164	216	138	9 - 17.6
	125	25	130	71	32	164	216	138	9 - 17.6
	125	32	130	76	32	164	216	138	9 - 17.6
	125	40	137	81	32	164	216	138	9 - 17.6
	125	63	160	100	35	164	265	143	9 - 17.6
	140	20	130	71	32	164	233	146	9 - 17.6
	140	25	130	71	32	164	233	146	9 - 17.6
	140	32	130	76	32	164	233	146	9 - 17.6
	140	40	137	81	32	164	233	146	9 - 17.6
	140	63	160	100	35	164	273	151	9 - 17.6
	160	20	130	71	32	164	243	156	9 - 17.6
	160	25	130	71	32	164	243	156	9 - 17.6
	160	32	130	76	32	164	243	156	9 - 17.6
	160	40	137	81	32	164	243	156	9 - 17.6
	160	63	160	100	35	164	283	161	9 - 17.6
	180	20	130	71	32	164	244	166	9 - 26
	180	25	130	71	32	164	244	166	9 - 26
	180	32	130	76	32	164	244	166	9 - 26
	180	40	137	81	32	164	244	166	9 - 26
	180	63	160	100	35	164	293	171	9 - 26
	200	20	130	71	32	164	254	176	9 - 26
	200	25	130	71	32	164	254	176	9 - 26
	200	32	130	76	32	164	254	176	9 - 26
	200	40	137	81	32	164	254	176	9 - 26

Data sheet

valid from: 1/24/25

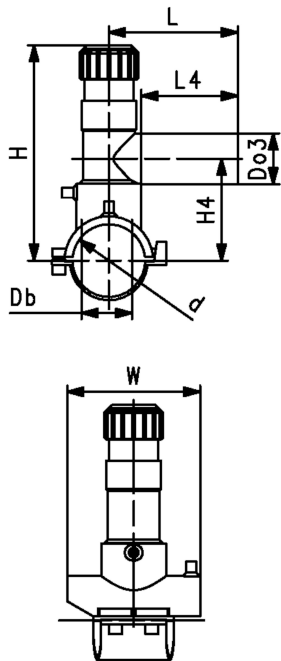

	d	Do3	L	L4	Db	W	H	H4	SDR pipe
	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	
	200	63	160	100	35	164	303	181	9 - 26
	225	20	130	71	32	164	266	188	11 - 26
	225	25	130	71	32	164	266	188	11 - 26
	225	32	130	76	32	164	266	188	11 - 26
	225	40	137	81	32	164	266	188	11 - 26
	225	63	160	100	35	164	315	193	11 - 26
	250	20	130	76	32	164	279	201	11 - 26
	250	25	130	76	32	164	279	201	11 - 26
	250	32	130	76	32	164	279	201	11 - 26
	250	63	160	100	35	164	328	206	11 - 26
	250	40	137	81	32	164	279	201	11 - 26
	280	63	160	100	35	164	343	206	11 - 26
	315	63	160	100	35	164	381	206	11 - 33
Topload	355	63	160	100	35	165	381	206	17 - 33
Topload	400	63	160	100	35	165	403	206	17 - 33

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail: info.ps@georgfischer.com Internet: <http://www.gfps.com>