

**Vanne à membrane DIASTAR Ten PVC-U
FC (Fermeture sans pression)
Avec bouts mâles pour collage métrique**

Exécution:

- Double débit
- Un écrou remplace 4 vis
- Intervalle de rotation de 90° de la connexion pneumatique
- Longueur totale selon EN 558


Option:

- Possibilité de configuration individuelle de la vanne
- Gamme d'accessoires simple disponible

*PN: PTFE

Pression : **1 côté**

*Matière du joint torique: FKM

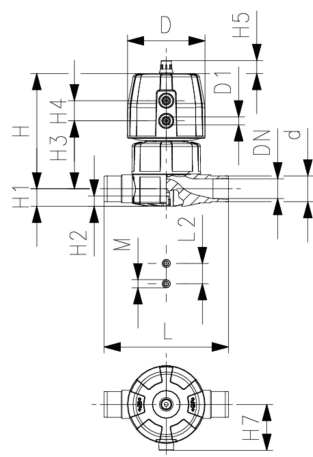

d	DN	Pouces	PN	PN*	Valeur-kv (Δp=1 bar)	EPDM Code	CAN	SP	Poids (kg)
(mm)	(mm)	(inch)	(bar)	(bar)	(l/min)				
20	15	½	10	10*	125	161 625 012		1	0.497
25	20	¾	10	10*	271	161 625 013		1	1.029
32	25	1	10	10*	481	161 625 014		1	1.223
40	32	1 ¼	10	10*	759	161 625 015		1	2.026
50	40	1 ½	10	10*	1263	161 625 016		1	3.550
63	50	2	6	6*	1728	161 625 017		1	4.368

d	PTFE/EPDM Code	CAN	SP	Poids (kg)
(mm)				
20	161 625 032		1	0.539
25	161 625 033		1	1.050
32	161 625 034		1	1.238
40	161 625 035		1	2.114
50	161 625 036		1	3.580
63	161 625 037		1	4.412

d	D	D1_G	H	H1	H2	H3	H4	H5	H7	L	L2	M	Course = Hx (mm)	Pouce (inch)
(mm)	(mm)	(inch)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)			
20	68	¾	101	14	12	60	24	16	43	124	25	M6	7	½
25	96	¾	132	18	12	73	25	16	57	144	25	M6	10	¾
32	96	¾	143	22	12	84	25	16	57	154	25	M6	13	1
40	120	¾	173	26	15	99	26	26	69	174	45	M8	15	1 ¼
50	150	¾	214	32	15	119	36	26	88	194	45	M8	19	1 ½
63	150	¾	226	39	15	132	36	26	88	224	45	M8	23	2

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:
info.ps@georgfischer.com Internet: <http://www.gfps.com>