








SYGEF Standard 3-Way ball valve type 543 Pro P
Horizontal/T-port
DA (Double acting)
Without manual override
With threaded sockets NPT

Model:

- Material: PVDF
- Control pressure supply through integrated NAMUR interface according VDI/VDE 3845 with 5.6 bar (81.2 psi)
- Basic position A-B-C opened, activated position B-C opened, see flow scheme
- Control time 90° < 1-2s
- For easy installation and removal
- Integrated stainless steel mounting inserts
- Full plastic solution (actuator housing made of PP-GF)
- Visual position indicator
- Z-dimension, valve end and union nut are compatible with types 285 – 288 and 543 (1st Generation)

Option:

- Position feedback sensor, incl. LED feedback (DN10-50) - PNP, NPN and NAMUR
- Positioner RPC, RPC D, RPC PID
- Individual configuration of the valve

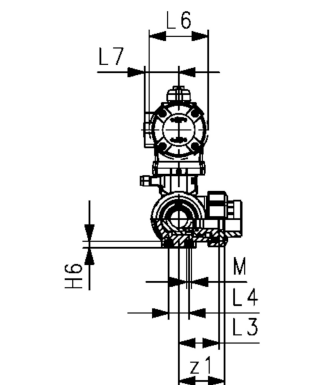

Size (inch)	d (mm)	DN (mm)	PN (bar)	kv-value (Δp=1 bar) (l/min)	Thread Type	FKM Code	SP	Weight (kg)
----------------	-----------	------------	-------------	-----------------------------------	-------------	-------------	----	----------------

3/8	16	10	10	140	NPT	199 297 272	1	0.991
1/2	20	15	10	200	NPT	199 297 273	1	0.999
3/4	25	20	10	470	NPT	199 297 274	1	1.157
1	32	25	10	793	NPT	199 297 275	1	1.394
1 1/4	40	32	10	1290	NPT	199 297 276	1	2.362
1 1/2	50	40	10	1910	NPT	199 297 277	1	2.928
2	63	50	10	3100	NPT	199 297 278	1	4.628

Actuator	D (mm)	H (mm)	H1 (mm)	H2 (mm)	H3 (mm)	H4 (mm)	H5 (mm)	H6 (mm)	L (mm)	L1 (mm)	L2 (mm)	L3 (mm)	L4 (mm)	L6 (mm)
PPA08	50	157	28	62	95	41	75	8	112	128	72	36	25	74
PPA08	50	157	28	62	95	41	75	8	114	128	72	36	25	74
PPA08	58	166	32	71	95	41	75	8	131	128	85	43	25	74
PPA08	68	166	36	71	95	41	75	8	154	128	98	49	25	74
PPA15	84	192	45	84	108	45	88	9	180	165	118	59	45	94
PPA15	97	192	51	84	108	45	88	9	203	165	135	68	45	94
PPA40	124	237	65	106	131	56	111	9	258	184	176	88	45	120

L7 (mm)	M (mm)	z (mm)	z1 (mm)
32	6	86	43
32	6	80	40
32	6	95	48
32	6	110	55
38	8	132	66
38	8	157	79
47	8	210	105

Data sheet

valid from: 6/21/23



The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland

Phone +41 -(0)52-631 1111

e-mail: info.ps@georgfischer.com

Internet: <http://www.gfps.com>