


Check valve type 562 ABS With solvent cement sockets Inch BS

Model:

- For horizontal or vertical installation
- Sealing at a minimum water column of 1 m
- Spring loaded, spring made of stainless steel (1.4310)
- Spring available in other materials, see spare parts
- Designed for easy installation and removal
- Vibration free even at high flow velocity
- Flow-optimized return cone, double guided
- Compact installation length, same as ball valve type 546
- Z-length, end connectors and union nuts **not** compatible with type 360
- New DN65-DN100

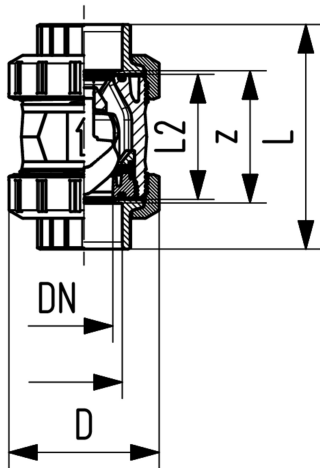

d	Size	DN	PN	kv-value	EPDM	SP	Weight	D	L	L2	z
(mm)	(inch)	(mm)	(bar)	($\Delta p=1$ bar)	Code		(kg)	(mm)	(mm)	(mm)	(mm)
16	3/8	10	10	190	169 562 061	1	0.090	50	92	56	60
20	1/2	15	10	180	169 562 062	1	0.090	50	95	56	60
25	3/4	20	10	380	169 562 063	1	0.190	58	110	65	69
32	1	25	10	460	169 562 064	1	0.210	68	123	71	75
40	1 1/4	32	10	850	169 562 065	1	0.370	84	146	85	89
50	1 1/2	40	10	1080	169 562 066	1	0.570	97	157	89	97
63	2	50	10	1670	169 562 067	1	1.000	124	183	101	110
75	2 1/2	65	10	2950	169 562 068	1	2.420	166	233	136	144
90	3	80	10	3600	169 562 069	1	3.890	200	254	141	151
110	4	100	10	4150	169 562 070	1	6.140	238	301	164	174

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:
info.ps@georgfischer.com Internet: <http://www.gfps.com>