



气动球阀546Pro PVC-U FO (常开)

带应急手柄

带固定法兰 日标JIS




气源压力4.2bar

型号:

- Namur标准气源接口满足VDI/VDE 3845, 气源压力4.2 bar (60.9 psi)
- 装配气动执行器PA11 (DN10/15-25), PA21 (DN32-50)
- 开关时间: 90°< 1-2s
- 安装简单, 易拆卸
- 内置不锈钢固定螺孔

选项:


- 可提供其他阀门配置

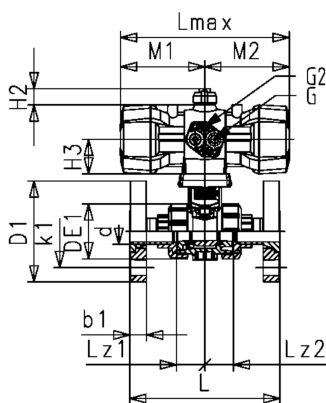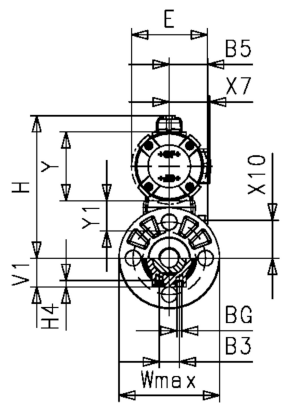

Inch (inch)	DN (mm)	PN (bar)	kv-value ($\Delta p=1$ bar) (l/min)	EPDM code	SP weight (kg)	FKM code	SP weight (kg)
1/2	15	10	185	199 255 143	1	1,700	199 255 153
1	25	10	700	199 255 145	1	2,100	199 255 155
3/4	20	10	350	199 255 144	1	1,900	199 255 154
1 1/4	32	10	1000	199 255 146	1	3,400	199 255 156
1 1/2	40	10	1600	199 255 147	1	3,800	199 255 157
2	50	10	3100	199 255 148	1	4,900	199 255 158

Inch (inch)	Actuator	D (mm)	M1 (mm)	M2 (mm)	Lmax (mm)	G2 (mm)	G (mm)	H3 (mm)	Lz1 (mm)	Lz2 (mm)	b1 (mm)	k1 (mm)	D1 (mm)	L (mm)
1/2	PPA15	50	106	106	211	M5	G 1/4	41	48	48	12	33	94	124
1	PPA15	68	106	106	211	M5	G 1/4	45	59	59	14	43	115	154
3/4	PPA15	58	106	106	211	M5	G 1/4	41	56	56	13	38	103	144
1 1/4	PPA40	84	123	123	246	M5	G 1/4	45	67	67	15	50	138	174
1 1/2	PPA40	97	123	123	246	M5	G 1/4	56	74	74	16	55	148	194
2	PPA40	124	123	123	246	M5	G 1/4	56	85	85	18	63	163	224

Inch (inch)	z (mm)	E (mm)	X7 (mm)	Y1 (mm)	Y2 (mm)	Y (mm)	H (mm)	H2 (mm)	X10 (mm)	B3 (mm)	BG (mm)	Wmax (mm)	V1 (mm)	H4 (mm)	G1 (mm)
1/2	96	94	51	35	60	68	228	20	38	25	M6	210	27	12	M5
1	118	94	51	35	60	68	232	20	42	25	M6	210	30	12	M5
3/4	11	94	51	35	60	68	238	20	47	25	M6	210	36	12	M5
1 1/4	133	120	62	33	60	91	268	20	57	45	M8	210	44	15	M5
1 1/2	147	120	62	33	60	91	274	20	63	45	M8	210	51	15	M5
2	169	120	62	36	60	91	289	20	78	45	M8	210	64	15	M5

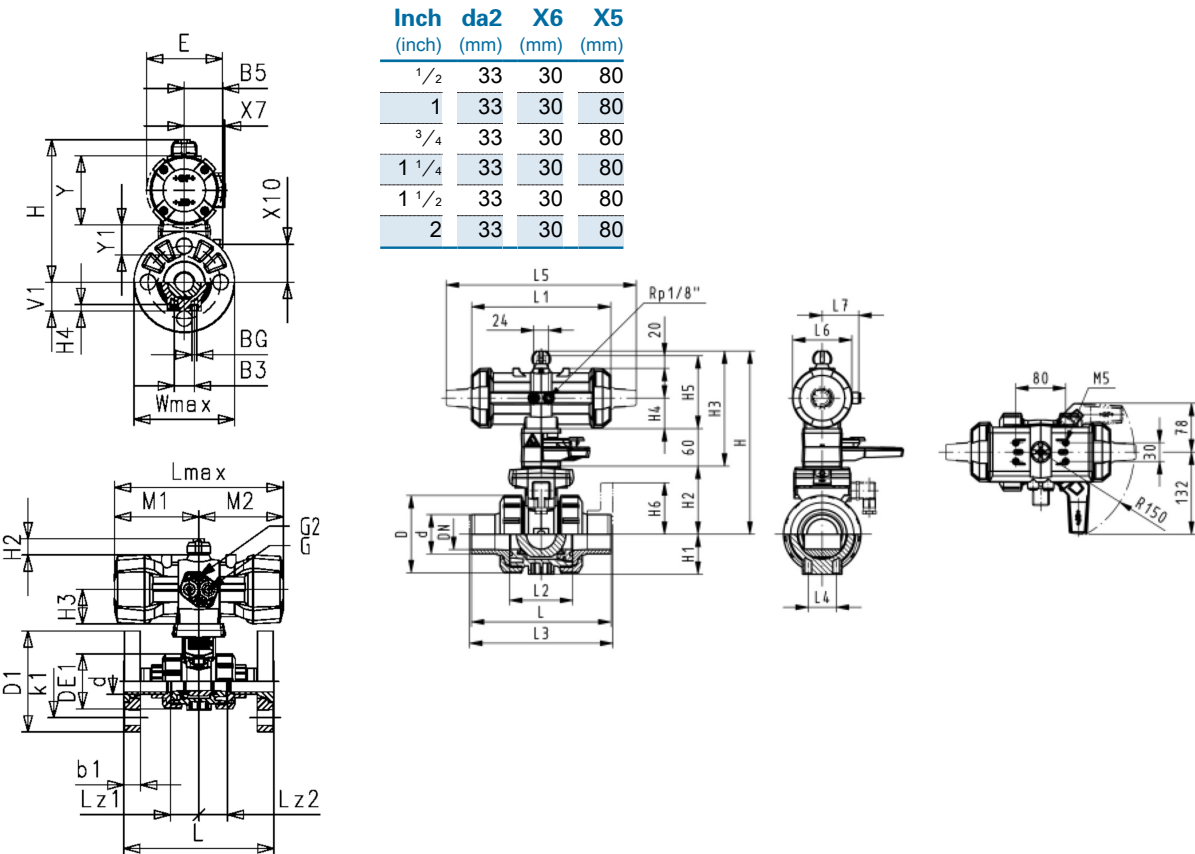

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail: info.ps@georgfischer.com Internet: <http://www.gfps.com>