


Tés à 90° réduits, moulés PE100 SDR11

Exécution:

- 10 bars gaz / 16 bars eau
- Fittings are injection moulded
- * FM 1613 approved - 15 bar

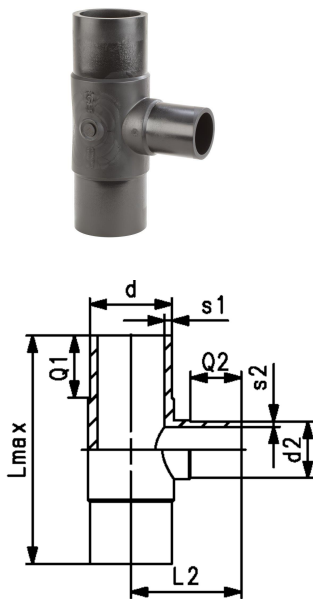

	d	d2	DN	PN	Code	poids	L2	Lmax	Q1	Q2	s1	s2
	(mm)	(mm)	(mm)	(bar)		(kg)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)
	63	32	50	16	753 201 022	0,300	86	218	65	47	5,8	3,0
	63	40	50	16	753 201 026	0,312	107	230	67	58	5,8	3,7
	63	50	50	16	753 201 021	0,300	100	218	65	59	5,8	4,6
	75	32	65	16	753 201 023	0,455	98	248	73	46	6,8	3,0
	75	50	65	16	753 201 024	0,485	109	248	73	58	6,8	4,6
	75	63	65	16	753 201 025	0,520	118	248	73	65	6,8	5,8
	90	50	80	16	753 201 027	0,794	120	280	79	55	8,2	4,6
	90	63	80	16	753 201 029	0,775	127	282	79	63	8,2	5,8
	90	75	80	16	753 201 055	0,800	132	286	80	75	8,2	6,8
	110	63	100	16	753 201 028	1,409	148	322	87	63	10,0	5,8
	110	75	100	16	753 201 131	1,382	155	324	85	74	10,0	6,8
	110	90	100	16	753 201 032	1,275	164	322	86	79	10,0	8,2
	125	90	100	16	753 201 132	1,997	165	354	90	82	11,4	8,2
	125	110	100	16	753 201 133	2,097	167	350	90	85	11,4	10,0
	160	63	150	16	753 201 034	2,680	174	416	105	65	14,6	5,8
	160	75	150	16	753 201 880	2,295	180	410	103	73	14,6	6,8
	160	90	150	16	753 201 036	2,775	190	415	101	79	14,6	8,2
	160	110	150	16	753 201 037	3,300	200	415	101	82	14,6	10,0
	180	90	150	16	753 201 881	4,857	200	476	108	82	16,4	8,2
	180	110	150	16	753 201 882	4,750	202	480	107	84	16,4	10,0
	180	160	150	16	753 201 883	4,715	220	480	110	101	16,4	14,6
	200	63	200	16	753 201 073	7,300	196	503	122	63	18,2	5,8
	200	90	200	16	753 201 074	9,730	216	500	122	79	18,2	8,2
	200	110	200	16	753 201 075	7,120	219	505	122	82	18,2	10,0
	200	160	200	16	753 201 076	9,730	237	500	122	92	18,2	14,6
	225	75	200	16	753 201 039	9,880	219	560	120	70	20,5	6,8
	225	90	200	16	753 201 040	6,633	228	555	120	80	20,5	8,2
	225	110	200	16	753 201 041	10,010	238	559	120	82	20,5	10,0
	225	160	200	16	753 201 042	8,095	258	555	120	98	20,5	14,6
	225	180	200	16	753 201 043	9,375	284	559	120	105	20,5	16,4
	250	110	250	16	753 201 078	11,820	284	584	130	82	22,7	10,0
	250	160	250	16	753 201 079	12,302	266	586	127	98	22,7	14,6
*	315	90	300	16	753 201 154	16,700	165	520	90	83	28,6	8,2
*	315	110	300	16	753 201 051	15,300	282	705	150	82	28,6	10,0
	315	160	300	16	753 201 052	22,998	301	705	150	102	28,6	14,6
	315	200	300	16	753 201 152	18,710	313	680	155	117	28,6	18,2
	315	225	300	16	753 201 153	20,160	320	680	153	125	28,6	20,5
	315	250	300	16	753 201 054	24,243	331	695	150	130	28,6	22,7

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail: info.ps@georgfischer.com Internet: <http://www.gfps.com>