


Check valve type 562 PVC-C With threaded sockets Rp

Model:

- For horizontal or vertical installation
- Sealing at a minimum water column of 1m
- Spring loaded, spring made of stainless steel (1.4310)
- Spring available in other materials, see spare parts
- Designed for easy installation and removal
- Vibration free even at high flow velocity
- Flow-optimised return cone, double guided
- Compact installation length, same as ball valve type 546
- Z-length, end connectors and union nuts **not** compatible with type 360
- New DN65-DN100

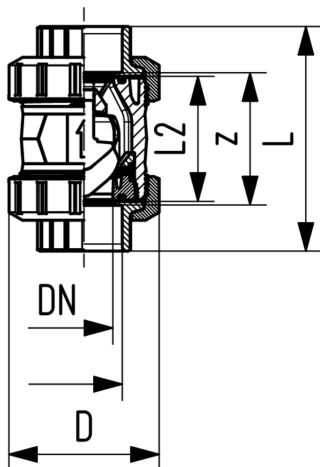

Rp (inch)	DN (mm)	PN (bar)	kv-value (Δp=1 bar) (l/min)	EPDM Code	SP	Weight (kg)	FKM Code	SP	Weight (kg)
3/8	10	10	190	163 562 021	1	0.120	163 562 031	1	0.120
1/2	15	10	180	163 562 022	1	0.120	163 562 032	1	0.120
3/4	20	10	380	163 562 023	1	0.260	163 562 033	1	0.280
1	25	10	460	163 562 024	1	0.290	163 562 034	1	0.290
1 1/4	32	10	850	163 562 025	1	0.490	163 562 035	1	0.500
1 1/2	40	10	1080	163 562 026	1	0.740	163 562 036	1	0.750
2	50	10	1670	163 562 027	1	1.530	163 562 037	1	1.530
2 1/2	65	10	2950	163 562 028	1	3.530	163 562 038	1	3.550
3	80	10	3600	163 562 029	1	5.670	163 562 039	1	5.700
4	100	10	4150	163 562 030	1	8.990	163 562 040	1	9.030

Rp (inch)	D (mm)	L (mm)	L2 (mm)	z (mm)
3/8	50	95	56	69
1/2	50	100	56	67
3/4	58	114	65	78
1	68	127	71	85
1 1/4	84	146	85	100
1 1/2	97	152	89	106
2	124	177	101	121
2 1/2	166	233	136	144
3	200	254	141	151
4	238	301	164	174

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail: info.ps@georgfischer.com Internet: <http://www.gfps.com>