



**3-Way ball valve type 543 Pro PVC-U**  
**Vertical/L-port**  
**With solvent cement sockets ASTM**

**Model:**



- Lockable lever standard (DN10-DN50)
- For easy installation and removal
- Ball seats PTFE
- Vertical inlet solvent cement spigot metric
- Angle of operation 360° without turn limiter
- Easy installation and removal using union on third outlet
- Electric actuator available separately
- Turn limiter 90° enclosed, in different positions usable as a clip-on ring
- Integrated stainless steel mounting inserts
- Delivery status A-C opened, see flow scheme
- Z-dimension, valve end and union nut are compatible with type 543 (1st Generation)

**Mode of action:**


- For interconnection of two inputs

**Option:**


- Interface-module with position feedback sensor, incl. LED feedback (DN10-50)
- Manual spring return lever ("Dead man") (DN10-25)
- Pneumatic or electric actuators from GF
- Individual configuration of the valve possible

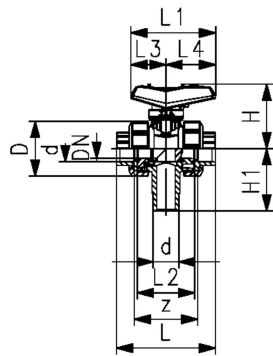

DN	Size	PN	Cv-value	EPDM	SP	FKM	SP
(mm)	(inch)	(bar)	(l/min)	Code	weight	Code	weight
					(kg)		(kg)
10	3/8	10	49	161 543 661	1	161 543 671	1
15	1/2	10	77	161 543 662	1	161 543 672	1
20	3/4	10	146	161 543 663	1	161 543 673	1
25	1	10	260	161 543 664	1	161 543 674	1
32	1 1/4	10	437	161 543 665	1	161 543 675	1
40	1 1/2	10	667	161 543 666	1	161 543 676	1
50	2	10	1293	161 543 667	1	161 543 677	1

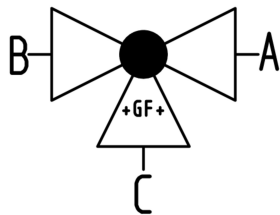

D	H	H1	L	L1	L2	L3	L4	z
(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)
50	61	62	106	82	56	32	45	67
50	61	62	105	82	56	32	45	61
58	74	72	121	106	66	39	58	70
68	80	77	133	106	71	39	58	76
84	95	87	152	131	85	54	74	90
97	102	97	165	131	89	54	74	94
124	117	112	183	152	101	66	87	107

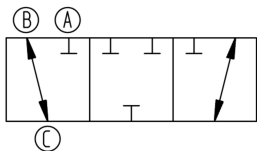

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail: info.ps@georgfischer.com Internet: <http://www.gfps.com>