




Stop-off saddle with PE-adaptor Maximum passage 50 mm

- 10 bar Gas / 16 bar Water
- Complete with lower part
- Supplied as Kit with PE-Stop-Off Adaptor
- PE Stop-Off insert
- 4mm pin connectors
- Limited path fusion indicators
- Maximum cutting diameter: For main dimension d63 and d75mm: d = 39mm; For main dimension d90mm: d = 50mm; For main dimension >d90mm: d = 56.5mm
- * Topload: delivery without lower part for assembling as Topload with tool no. 799.350.477; angled adaptor (799.350.340) for fusion cable required

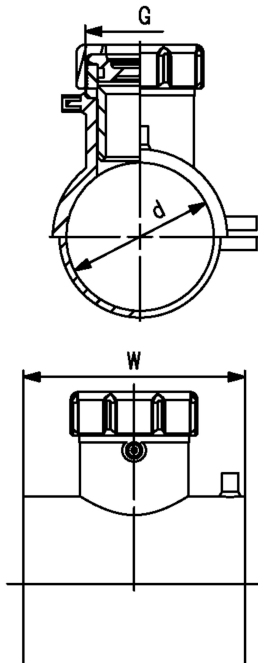

d	DN	PN	Code	Weight	G	W	SDR pipe
(mm)	(mm)	(bar)		(kg)	(inch)	(mm)	
63	50	16	193 149 237	0.606	2 3/4	164	9 - 11
75	65	16	193 149 247	0.765	2 3/4	164	9 - 11
90	80	16	193 149 257	0.696	2 3/4	164	9 - 11
110	100	16	193 149 267	0.732	2 3/4	164	9 - 17.6
125	100	16	193 149 277	0.785	2 3/4	164	9 - 17.6
140	125	16	193 149 287	0.820	2 3/4	164	9 - 17.6
160	150	16	193 149 297	0.772	2 3/4	164	9 - 17.6
180	150	16	193 149 307	0.920	2 3/4	164	9 - 26
200	200	16	193 149 317	0.913	2 3/4	164	9 - 26
225	200	16	193 149 327	0.910	2 3/4	164	9 - 26
250	250	16	193 149 337	0.936	2 3/4	164	9 - 26
280	250	16	193 149 348	0.920	2 3/4	164	9 - 26
315	300	16	193 149 358	0.660	2 3/4	164	9 - 33
*	355	350	193 149 357	0.660	2 3/4	165	9 - 33
*	400	400	193 149 377	0.920	2 3/4	165	9 - 33

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail: info.ps@georgfischer.com Internet: <http://www.gfps.com>