



ABS Ball valve type 127
24V
With manual emergency override
With butt fusion spigots long

Model:

- Built on with electric actuator EA15
- Voltage 24V AC/DC
- Factory set control range 90°<
- Heating element, position feedback (Open/Close)
- Integrated stainless steel mounting inserts


Option:

- Other valve and actuator configurations available
- Optional accessories: Fail-safe return unit


d (mm)	DN (mm)	PN (bar)	kv-value ($\Delta p=1$ bar) (l/min)	EPDM Code
20	15	10	185	199 127 393
25	20	10	350	199 127 394
32	25	10	700	199 127 395
40	32	10	1000	199 127 396
50	40	10	1600	199 127 397
63	50	10	3100	199 127 398

d (mm)	D (mm)	H (mm)	H1 (mm)	H2 (mm)	H3 (mm)	H4 (mm)	H5 (mm)	L (mm)	L1 (mm)	L2 (mm)	L4 (mm)	L5 (mm)	L6 (mm)	L7 (mm)	L8 (mm)
20	50	197	27	60	64	12	137	222	161	56	25	77	83	122	33
25	58	201	30	64	73	12	137	234	161	65	25	77	83	122	33
32	68	207	36	70	73	12	137	253	161	71	25	77	83	122	33
40	84	213	44	76	84	12	137	286	161	85	45	77	83	122	33
50	97	219	51	82	84	12	137	330	161	89	45	77	83	122	33
63	124	234	64	97	106	12	137	375	161	101	45	77	83	122	33

d (mm)	M	closest inch (inch)
20	M6	½
25	M6	¾
32	M6	1
40	M8	1 ¼
50	M8	1 ½
63	M8	2

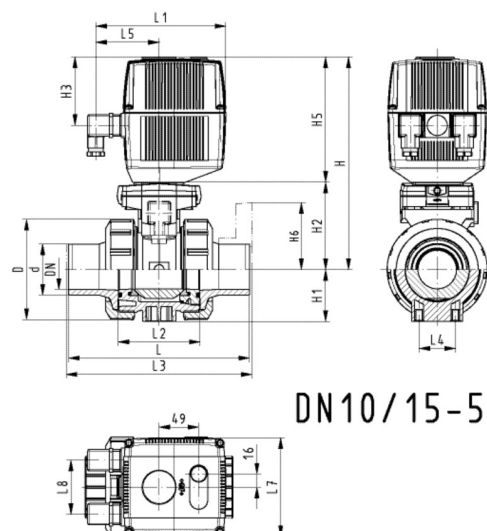

DN10/15-50

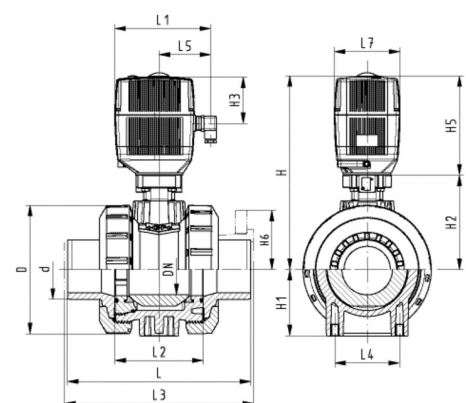

DN65-100

Data sheet

valid from: 2/7/25



The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:
info.ps@georgfischer.com Internet: <http://www.gfps.com>