


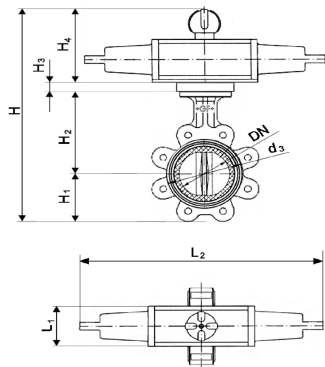

Lug-Style, end Installation butterfly valve metal type 038

With pneumatic actuator - fail safe to close (FC)

Flange standard metric - PN10

Disc: stainless steel DIN Norm 1.4408 without coating

Model:

- Lug Style
- Body GGG40 (A 395 M:88, EN-JS 1020 EN1563) Rilsan coating
- Installation length: EN 558 row 20
- Interface according to DIN/ISO 5211
- Pressure range: 10 bar (DN 50-200); 6 bar (DN 250); 4 bar (DN 300 - 600)
- Axis DN50 - DN300: Single-piece axis with square profile, material stainless steel DIN Norm 1.4021
- Flange connection: DN50 - DN300: PN6, PN10, ANSI 125/150 Lbs., BS 10-D/E

Option:

- Other liner material on request

d (mm)	DN (mm)	Size (inch)	PN (bar)	kv-value ($\Delta p=1$ bar) (l/min)	Disc: ductile iron/Rilsan® coated EPDM Code	SP	Weight (kg)
63	50	2	10	3140	199 038 252	1	5.87
75	65	2 ½	10	4570	199 038 253	1	6.97
90	80	3	10	7140	199 038 254	1	8.67
110	100	4	10	11710	199 038 255	1	12.96
140	125	5	10	18570	199 038 256	1	14.76
160	150	6	10	27130	199 038 257	1	20.85
225	200	8	10	47130	199 038 258	1	29.67
280	250	10	10	77110	199 038 259	1	47.40
315	300	12	10	114240	199 038 260	1	67.05

d (mm)	Disc: stainless steel EPDM Code	Liner: EPDM DVGW Code	Liner: NBR Code
63	199 038 265	199 038 511	199 038 313
75	199 038 266	199 038 512	199 038 314
90	199 038 267	199 038 513	199 038 315
110	199 038 268	199 038 514	199 038 316
140	199 038 269	199 038 515	199 038 317
160	199 038 270	199 038 516	199 038 318
225	199 038 271	199 038 517	199 038 319
280	199 038 272	199 038 518	199 038 320
315	199 038 273	199 038 519	Auf Anfrage

d (mm)	Type of actu- ator	H (mm)	H1 (mm)	H2 (mm)	H3 (mm)	H4 (mm)	L1 (mm)	L2 (mm)
63	PA-30	321	63	140	15	103	65	272
75	PA-30	343	73	152	15	103	65	272
90	PA-35	365	81	159	12	113	72	336
110	PA-40	420	97	178	15	130	80	364
140	PA-45	455	112	191	12	140	90	403
160	PA-50	487	122	203	12	150	100	418
225	PA-60	580	149	245	12	174	124	497
280	PA-60	672	203	275	20	174	124	497
315	PA-70	774	241	315	20	198	145	652

Data sheet

valid from: 4/3/25



The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:
info.ps@georgfischer.com Internet: <http://www.gfps.com>