



*



Diaphragm valve type 317 PVC-U SF With flanges PVC-U Inch ANSI

Model:


- Silicone free / paint-compatible
- Flat sealing faces
- Overall length according to EN 558
- Connecting dimension: ANSI/ASME B 16.5 class 150, ASTM D 4024, BS 1560, BS EN 1759

Option:


- Handwheel lockable DN65 (basic version not lockable)

* **DN80, DN100 and DN150 fixed flanges metric and inch ANSI B16.5**

	d (mm)	DN (mm)	Size (inch)	PN (bar)	kv-value ($\Delta p=1$ bar) (l/min)	EPDM Code	PTFE with EPDM supp. diaphragm Code	Weight (kg)
	75	65	2 1/2	10	992	161 317 753	161 317 768	4.420
*	90	80	3	10	1700	161 317 424	161 317 439	9.600
*	110	100	4	6	2700	161 317 425	161 317 440	13.360



DN 15-65

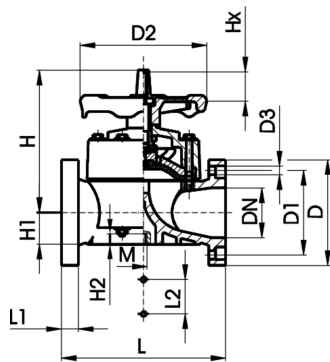

DN 80-100

	D (mm)	D1 (mm)	D2 (mm)	D3 (mm)	H (mm)	H1 (mm)	H2 (mm)	L (mm)	L1 (mm)	L2 (mm)	M	Lift = Hx (mm)	AL
	185	140	152	19	201	46	15	290		70	M8	30	4
*	200	160	270	18	265	57	23	310	35	120	M12	40	8
*	225	180	270	18	304	69	23	350	35	120	M12	50	8

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:
info.ps@georgfischer.com Internet: <http://www.gfps.com>