




**SYGEF Standard**  
**PVDF 止回阀#562型**  
**带红外焊/对焊端 公制**

**型号:**

- 材质：PVDF
- 适用于垂直或水平安装
- 最低密封背压1m水柱
- 弹簧预载，弹簧材质不锈钢(1.4310)
- 弹簧可用其他材料代替，见备件
- 安装简单，易拆卸
- 即使在高流速下也无振动
- 锥形球面，优化流体形态，双导向
- 紧凑型安装长度，与546型球阀相同
- Z尺寸，阀端和阀门螺帽与360型不兼容

注意：请确保避免由于焊缝导致的直径缩小(湍流)

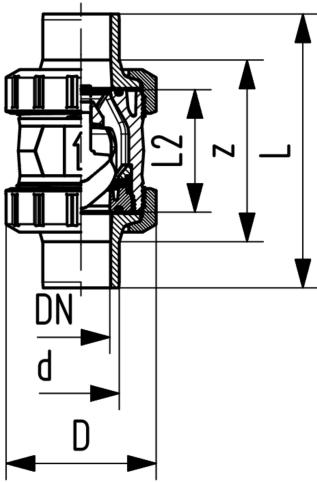

d	DN	PN	kv-value	FKM	weight	D	L	L2	e	Size
(mm)	(mm)	(bar)	( $\Delta p=1$ bar)	code	(kg)	(mm)	(mm)	(mm)	(mm)	(inch)
			(l/min)							
20	15	16	180	<b>175 562 092</b>	0,160	50	130	56	1,9	1/2
25	20	16	380	<b>175 562 093</b>	0,350	58	143	65	1,9	3/4
32	25	16	460	<b>175 562 094</b>	0,380	68	150	71	2,4	1
40	32	16	850	<b>175 562 095</b>	0,660	84	171	85	2,4	1 1/4
50	40	16	1080	<b>175 562 096</b>	1,000	97	191	89	3,0	1 1/2
63	50	16	1670	<b>175 562 097</b>	1,790	124	220	101	3,0	2
75	65	16	2950	<b>175 562 098</b>	3,680	166	270	136	3,6	2 1/2
90	80	16	3600	<b>175 562 099</b>	5,760	200	265	141	4,3	3
110	100	16	4150	<b>175 562 100</b>	9,270	238	305	164	5,3	4

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail: info.ps@georgfischer.com Internet: <http://www.gfps.com>