



Lug-Style, end installation butterfly valve metal type 038

With gear box

Flange standard - ANSI


Disc: stainless steel DIN Norm 1.4408 without coating

Model:

- Lug Style
- Body GGG40 (A 395 / A395 M-99, EN-JIS 1020 EN1563) Rilsan® coating
- Body from DN350 Epoxy® coating
- Installation length: EN 558 row 20
- Interface according to DIN EN ISO 5211
- Pressure range: 16 bar (DN 50-300); 10 bar (DN 350-600)
- Axis DN50 - DN300: Single-piece axis with square profile, material stainless steel DIN Norm 1.4021
- Axis DN350 - DN600: 2-pieces axis keyway profile, material: stainless steel DIN Norm 1.4021
- Flange connection: DN50 - DN300: PN6, PN10, ANSI 125/150 Lbs., BS 10-D/E
- Flange connection: PN10

Option:

- Other liner material on request
- Electric and pneumatic actuator on request

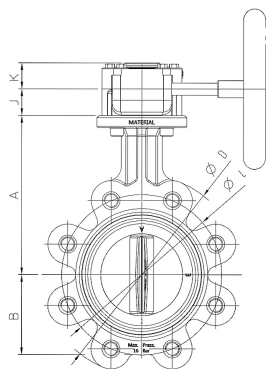

d (mm)	DN (mm)	Size (inch)	PN (bar)	kv-value ($\Delta p=1$ bar) (L/min)	Liner: EPDM Code	PF	SP	Weight (kg)	Liner: FKM Code
63	50	2	16	3140	199 038 687	3 39 226 102	1	3.30	199 038 713
75	65	2 ½	16	4570	199 038 688	3 39 226 102	1	3.60	199 038 714
110	100	4	16	11710	199 038 690	3 39 226 102	1	4.80	199 038 716
90	80	3	16	7140	199 038 689	3 39 226 102	1	3.80	199 038 715
140	125	5	16	18570	199 038 691	3 39 226 102	1	5.60	199 038 717
160	150	6	16	27130	199 038 692	3 39 226 102	1	7.00	199 038 718
225	200	8	16	47130	199 038 693	3 39 226 102	1	9.50	199 038 719
280	250	10	16	77110	199 038 694	3 39 226 102	1	31.60	199 038 720
315	300	12	16	114240	199 038 695	3 39 226 102	1	31.60	199 038 721
350	350	14	10	143360	199 038 696	3 39 226 102	1	68.10	
400	400	16	10	186700	199 038 697	3 39 226 102	1	109.10	
450	450	18	10	258390	199 038 698	3 39 226 102	1	139.30	
500	500	20	10	316730	199 038 699	3 39 226 102	1	183.50	
630	600	24	10	431750	199 038 700	3 39 226 102	1	346.00	

d (mm)	D5 (mm)	H (mm)	H1 (mm)	H2 (mm)	H3 (mm)	L (mm)	L1 (mm)	L2 (mm)	L3 (mm)	L4 (mm)
63	125	261	63	140	58	43	84	152	38	107
75	125	283	73	152	58	46	84	152	38	107
110	125	333	97	178	58	52	84	152	38	107
90	125	298	81	159	58	46	84	152	38	107
140	125	361	112	191	58	56	84	152	38	107
160	125	383	122	203	58	56	84	152	38	107
225	125	452	149	245	58	60	84	152	38	107
280	250	545	203	275	67	68	106	152	52	141
315	250	623	241	315	67	78	106	152	52	141
350	300	686	291	307	88	78	198	282	71	155
400	300	760	325	342	93	102	227	270	86	186
450	300	864	375	387	102	113	258	326	105	215
500	400	908	381	425	102	126	258	326	105	215
630	400	1107	488	532	155	146	403	447	211	354

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Data sheet

valid from: 3/2/26



Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:
info.ps@georgfischer.com Internet: <http://www.gfps.com>