




Tapping saddle d63-160 Monobloc version

- 10 bar Gas / 16 bar Water
- With integrated cutter to tap live mains under pressure
- Complete with moulded-on lower part
- 4mm pin connectors
- Limited path fusion indicators
- Long fusion outlet
- O-ring-sealed screw cap

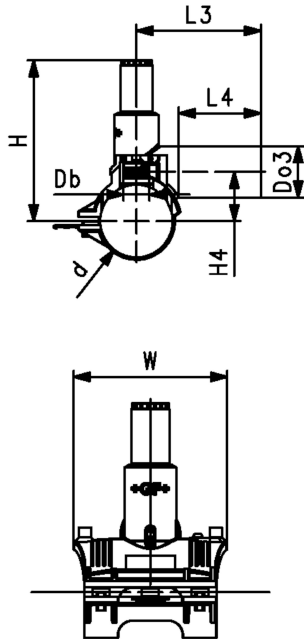

d	Do3	DN	PN	Code	Weight	L3	L4	Db	W	H	H4	SDR pipe
(mm)	(mm)	(mm)	(bar)		(kg)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	
63	20	50	16	193 131 932	0.368	110	76	25	144	146	44	9 - 11
63	25	50	16	193 131 933	0.393	110	76	25	144	146	44	9 - 11
63	32	50	16	193 131 934	0.376	110	76	25	144	146	44	9 - 11
90	20	80	16	193 131 952	0.494	115	76	32	162	198	61	9 - 17.6
90	25	80	16	193 131 953	0.503	115	76	32	162	198	61	9 - 17.6
90	32	80	16	193 131 954	0.505	115	76	32	162	198	61	9 - 17.6
90	63	80	16	193 131 957	0.667	115	76	32	162	198	61	9 - 17.6
110	20	100	16	193 131 962	0.560	115	76	32	162	208	71	9 - 17.6
110	25	100	16	193 131 963	0.570	115	76	32	162	208	71	9 - 17.6
110	32	100	16	193 131 964	0.574	125	76	32	162	208	71	9 - 17.6
110	63	100	16	193 131 967	0.684	160	100	32	162	208	71	9 - 17.6
125	20	100	16	193 131 972	0.562	120	76	32	162	216	79	9 - 17.6
125	25	100	16	193 131 973	0.552	120	76	32	162	216	79	9 - 17.6
125	32	100	16	193 131 974	0.574	120	76	32	162	216	79	9 - 17.6
125	63	100	16	193 131 977	0.704	120	76	32	162	216	79	9 - 17.6
160	20	150	16	193 131 992	0.631	120	76	32	162	233	96	11 - 17.6
160	25	150	16	193 131 993	0.641	125	76	32	162	233	96	11 - 17.6
160	32	150	16	193 131 994	0.648	130	76	32	162	233	96	11 - 17.6
160	63	150	16	193 131 997	0.794	170	100	32	162	233	96	11 - 17.6

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail: info.ps@georgfischer.com Internet: <http://www.gfps.com>