


Pressure reducing valve type 582 PVC-C
With solvent cement spigots metric
Without manometer

Model:

- Diaphragm PTFE/EPDM
- Integrated stainless steel mounting inserts
- 0.5-9.0 bar (7-130 psi)

0.3-3.0 bar (4-44 psi) on request

Manometer on request

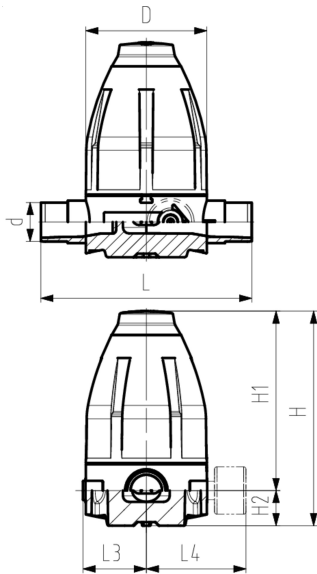

d	DN	Size	PN	O-rings	Weight	SP	GP	O-rings
(mm)	(mm)	(inch)	(bar)	EPDM	(kg)			FKM
				Code				Code
16	10	3/8	10	163 582 001	0.650	1		163 582 011
20	15	1/2	10	163 582 002	0.650	1		163 582 012
25	20	3/4	10	163 582 003	1.450	1		163 582 013
32	25	1	10	163 582 004	1.460	1		163 582 014
40	32	1 1/4	10	163 582 005	4.070	1		163 582 015
50	40	1 1/2	10	163 582 006	4.080	1		163 582 016
63	50	2	10	163 582 007	4.160	1		163 582 017

d	D	H	H1	H2	H3	L	L3	M	closest inch
(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)		(inch)
16	79	132	111	21	12	134	42	M6	3/8
20	79	132	111	21	12	134	42	M6	1/2
25	100	177	148	29	14	174	53	M6	3/4
32	100	177	148	29	14	174	53	M6	1
40	147	251	207	44	21	224	76	M8	1 1/4
50	147	251	207	44	21	224	76	M8	1 1/2
63	147	251	207	44	21	244	76	M8	2

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:

info.ps@georgfischer.com Internet: <http://www.gfps.com>