


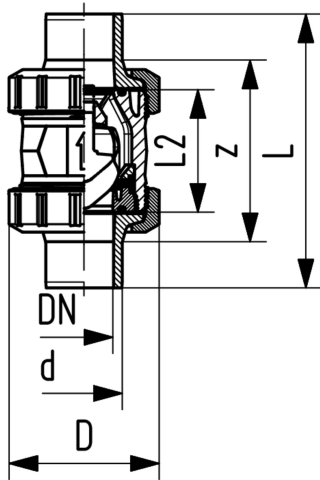

Check valve type 562 PVC-U
With solvent cement spigots metric

Model:

- For horizontal or vertical installation
- Spring loaded, spring made of stainless steel (1.4310)
- Spring available in other materials, see spare parts
- Designed for easy installation and removal
- Vibration free even at high flow velocity
- Flow-optimized return cone, double guided
- Compact installation length, same as ball valve type 546
- Z-length, end connectors and union nuts **not** compatible with type 360

d (mm)	DN (mm)	PN (bar)	kv-value ($\Delta p=1$ bar) (l/min)	EPDM Code	SP	Weight (kg)	FKM Code	SP	Weight (kg)
16	10	16	190	161 562 041	1	0.130	161 562 051	1	0.130
20	15	16	180	161 562 042	1	0.130	161 562 052	1	0.130
25	20	16	380	161 562 043	1	0.270	161 562 053	1	0.290
32	25	16	460	161 562 044	1	0.320	161 562 054	1	0.320
40	32	16	850	161 562 045	1	0.530	161 562 055	1	0.530
50	40	16	1080	161 562 046	1	0.810	161 562 056	1	0.810
63	50	16	1670	161 562 047	1	1.450	161 562 057	1	1.450
75	65	16	2950	161 562 048	1	3.370	161 562 058	1	3.380
90	80	16	3600	161 562 049	1	5.320	161 562 059	1	5.340
110	100	16	4150	161 562 050	1	8.500	161 562 060	1	8.540

d (mm)	D (mm)	L (mm)	L2 (mm)	closest inch (inch)
16	50	114	56	$\frac{3}{8}$
20	50	124	56	$\frac{1}{2}$
25	58	144	65	$\frac{3}{4}$
32	68	154	71	1
40	84	174	85	1 $\frac{1}{4}$
50	97	194	89	1 $\frac{1}{2}$
63	124	224	101	2
75	166	284	136	2 $\frac{1}{2}$
90	200	300	141	3
110	238	340	164	4

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:
info.ps@georgfischer.com Internet: <http://www.gfps.com>